


Installation manual

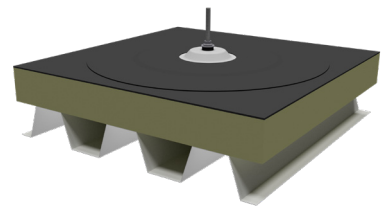


ValkSolarFix


Mounting in steel sheet roof with toggle anchor
for flat and pitched roofs

Installation manual **ValkSolarFix** / Mounting in steel sheet roof with toggle anchor

Needed tools			
Wrench 15		Drill hammer	
Fixation tool 15 L=200 mm		Metal hole saw 30mm	



Separate components		
Article number	Description	
747600	ValkSolarFix Low h=20mm	
747601	ValkSolarFix Low h=20mm - PVC coated <i>* On request only, not in stock as standard.</i>	
747605	ValkSolarFix Low - PVC cover	
747620	ValkSolarFix - SS toggle anchor M10 L=400mm <i>* Height from top edge of roof covering to top edge of high crown/cannalure steeldeck: max 270mm</i>	
747621	ValkSolarFix - SS toggle anchor M10 L=500mm <i>* Height from top edge of roof covering to top edge of high crown/cannalure steeldeck: max 370mm</i>	
747695	ValkSolarFix fixation tool 15 L-200mm	

1 ValkSolarFix - SS toggle anchor


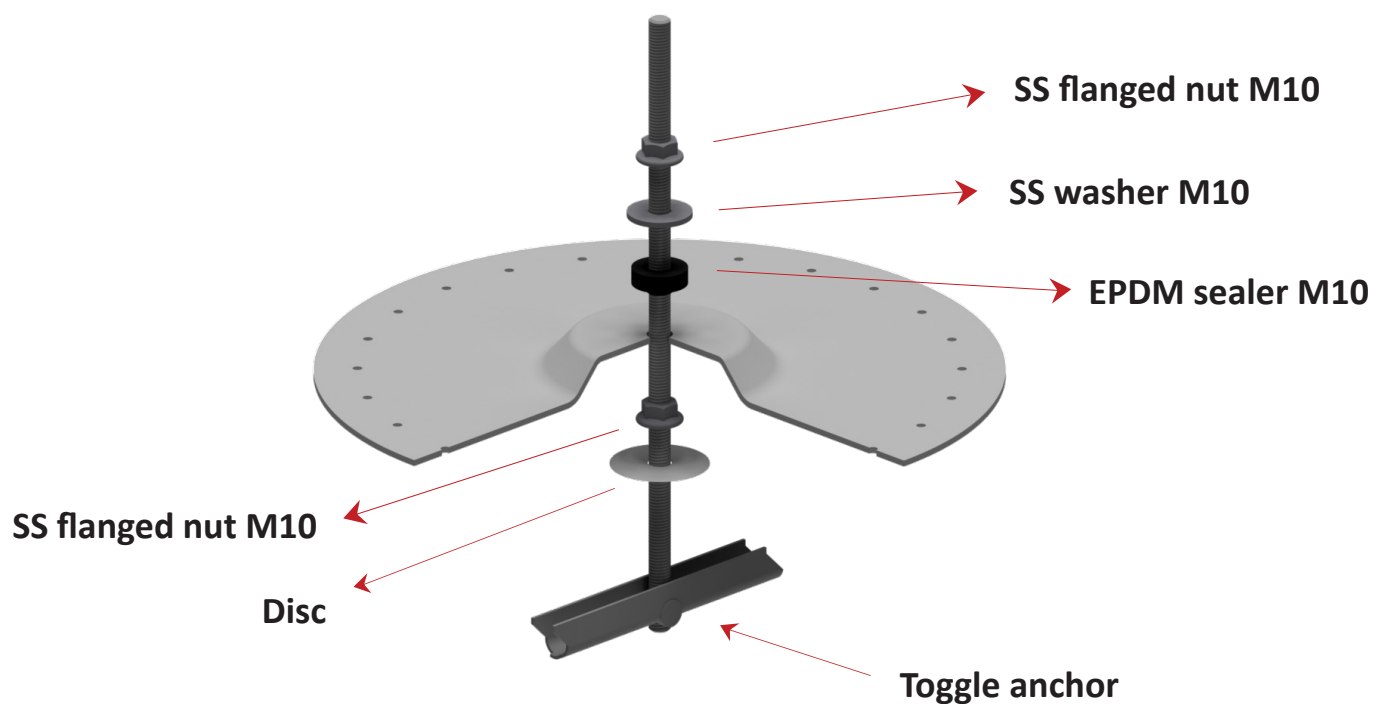


2 Needed in high part of the cannalure
- drill hole in crown


Thickness steel sheet:
- 0.5mm to 2.5mm
- max 2.5mm in case of double
sheet / overlapping sheet

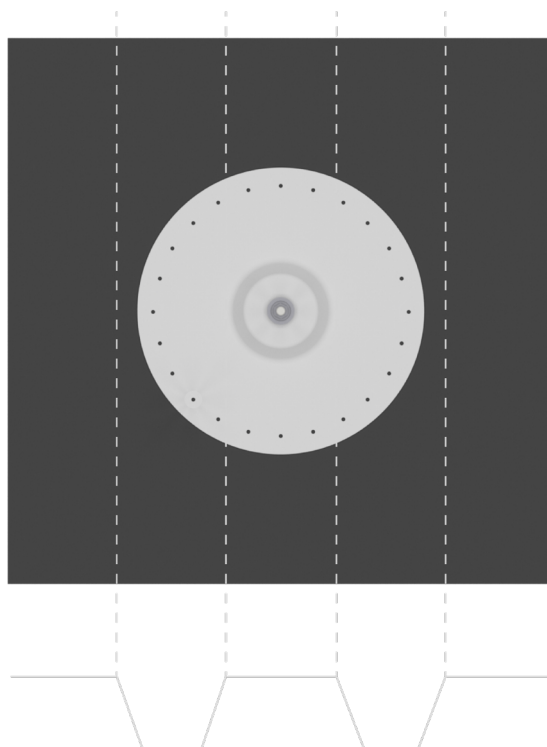


3

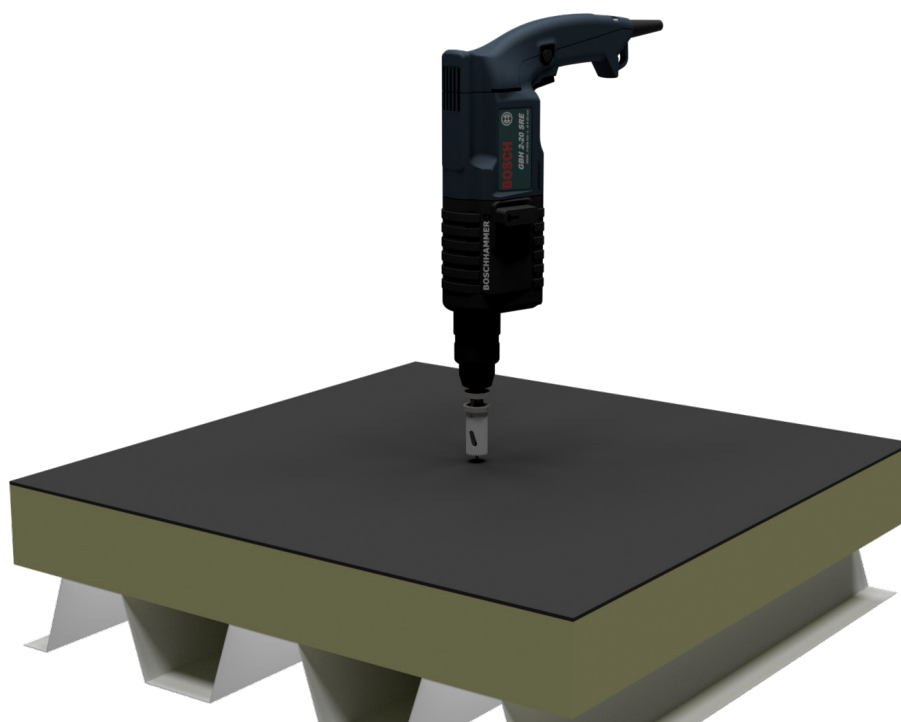



4



or

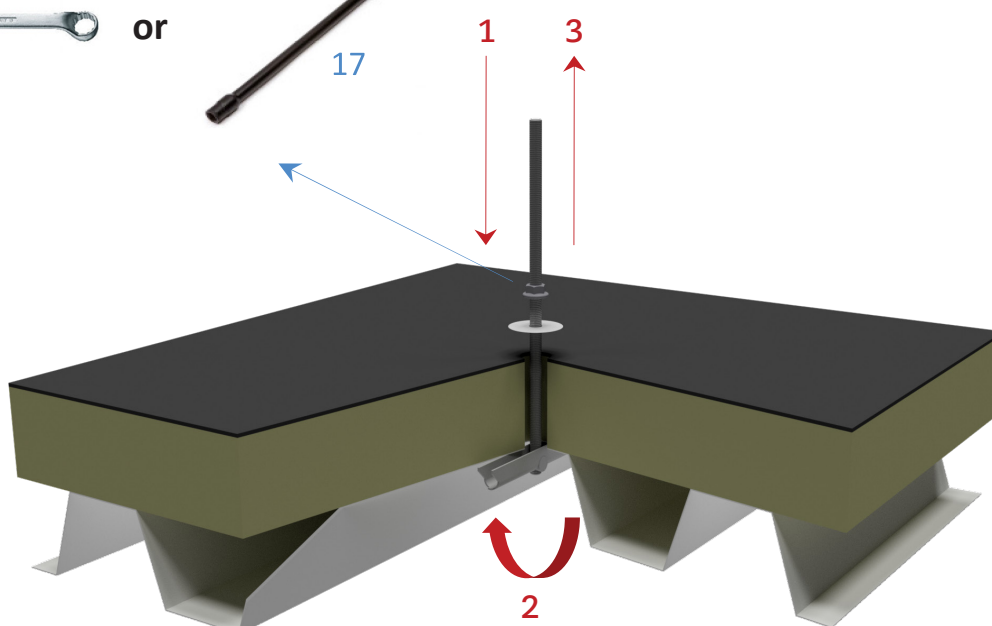

5

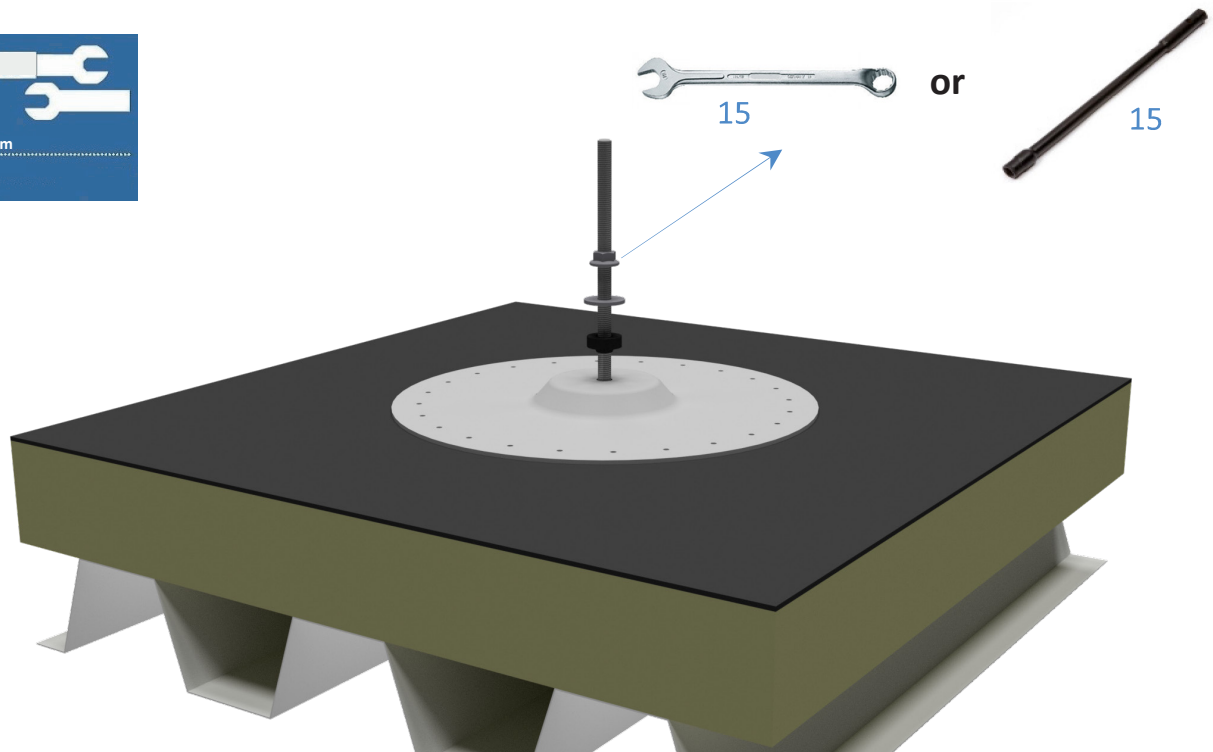


6

Advice installation membrane:



Advice size rosette:
- 540mm outer size
- 130mm inner size

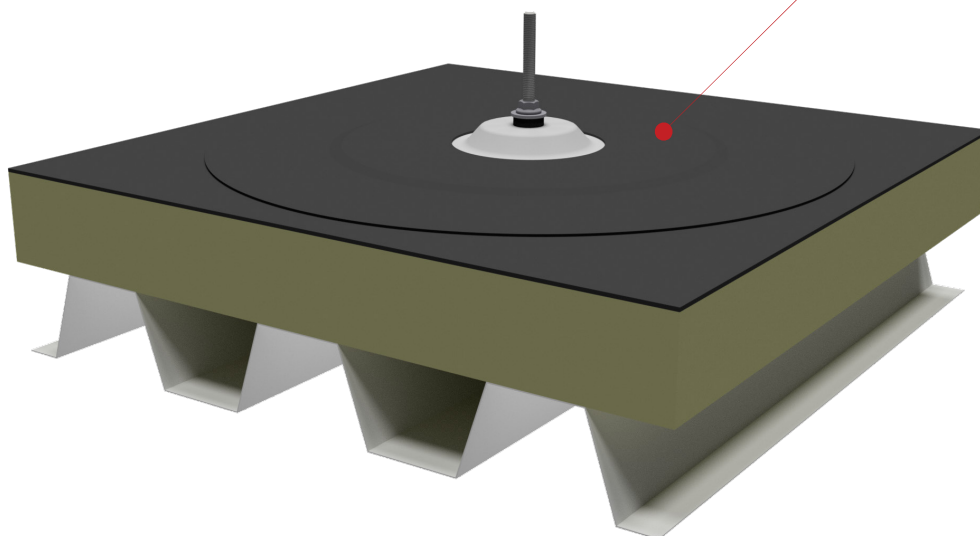

**For the watertight finishing of the consoles please contact your certified roofer.
Advice: first degrease the ValkSolarFix before making a watertight seal.**