












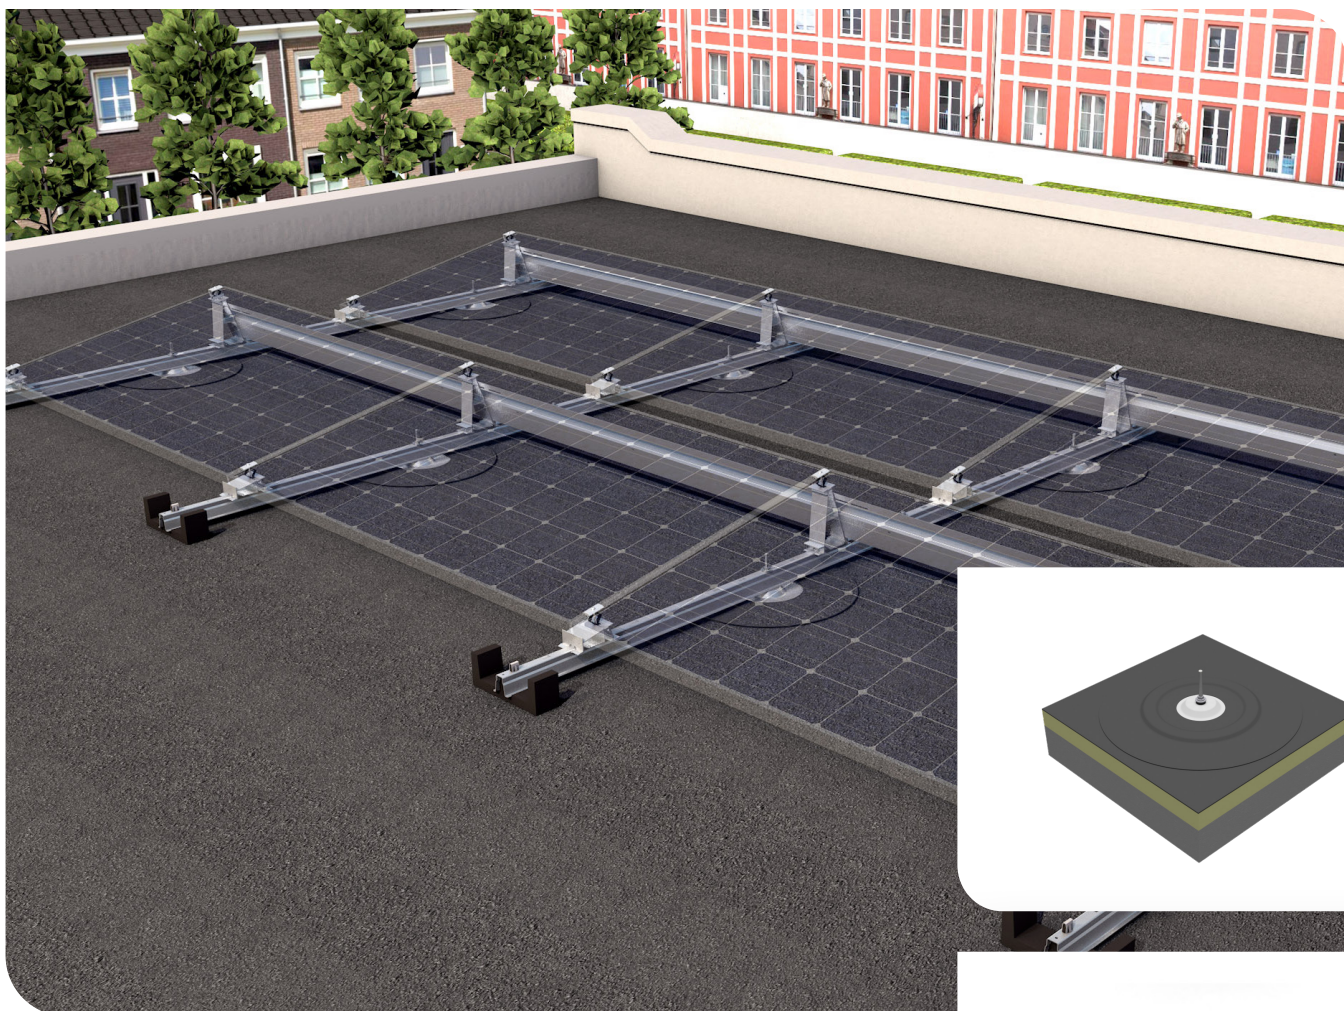








Installation manual




ValkSolarFix

Mounting in aerated concrete with aerated concrete screws
for flat and pitched roofs

Needed tools			
Wrench 15 + 17		Drill	
Fixation tool 15 L=200 mm		Torx Bit TX25 25 mm	



Separate components		
Article number	Description	
747600	ValkSolarFix Low h=20mm	
747601	ValkSolarFix Low h=20mm - PVC coated* * On request only, not in stock as standard.	
747605	ValkSolarFix Low - PVC cover	
747604	ValkSolarFix - Ss. mounting set M10 + sealing ring	
747651	ValkSolarFix - Roof screws for aerated concrete 90mm * Height from top edge of roof covering to top edge of aerated concrete: max 25mm	
747652	ValkSolarFix - Roof screws for aerated concrete 110mm * Height from top edge of roof covering to top edge of aerated concrete: max 45mm	
747653	ValkSolarFix - Roof screws for aerated concrete 130mm * Height from top edge of roof covering to top edge of aerated concrete: max 65mm	
747654	ValkSolarFix - Roof screws for aerated concrete 160mm * Height from top edge of roof covering to top edge of aerated concrete: max 95mm	
747655	ValkSolarFix - Roof screws for aerated concrete 190mm * Height from top edge of roof covering to top edge of aerated concrete: max 125mm	
747656	ValkSolarFix - Roof screws for aerated concrete 240mm * Height from top edge of roof covering to top edge of aerated concrete: max 175mm	
747695	ValkSolarFix fixation tool 15 L-200mm	

1 ValkSolarFix Low 20mm + SS mounting set + seal

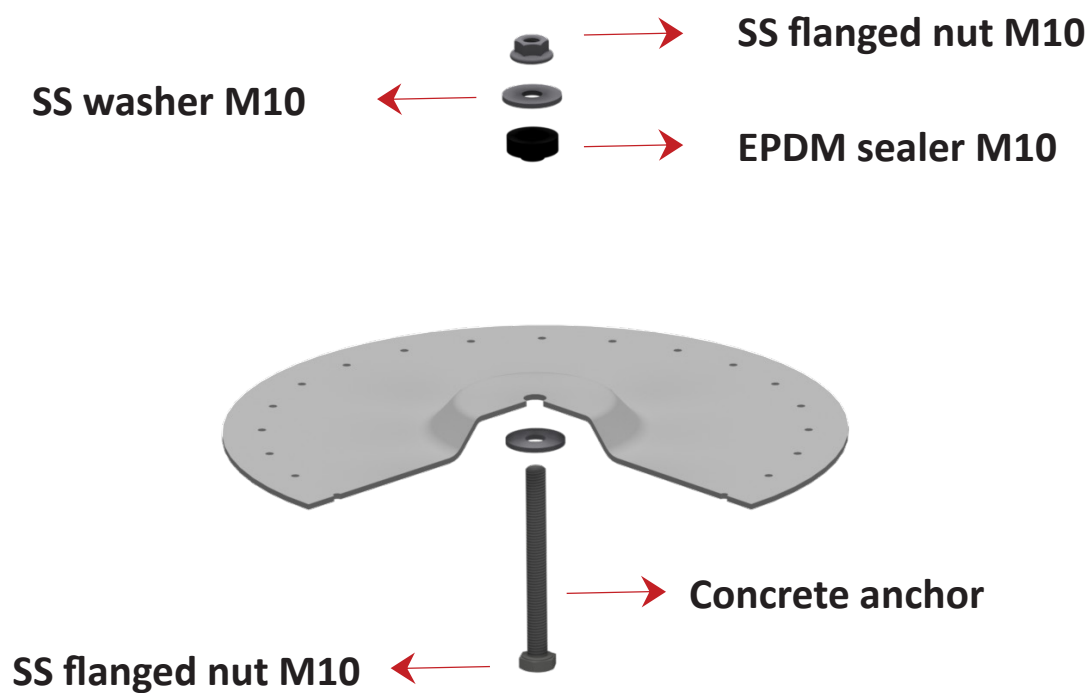


2

1 Nm
15 + 17

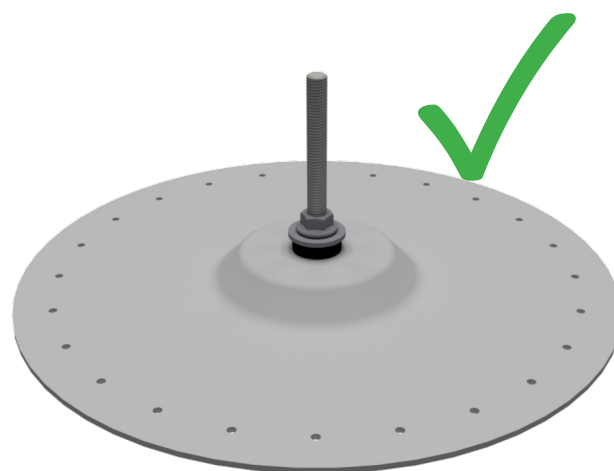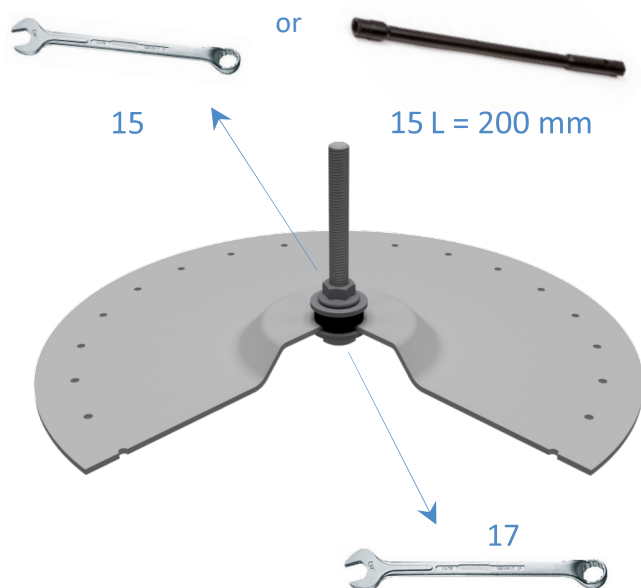

3


Min. thickness
100mm

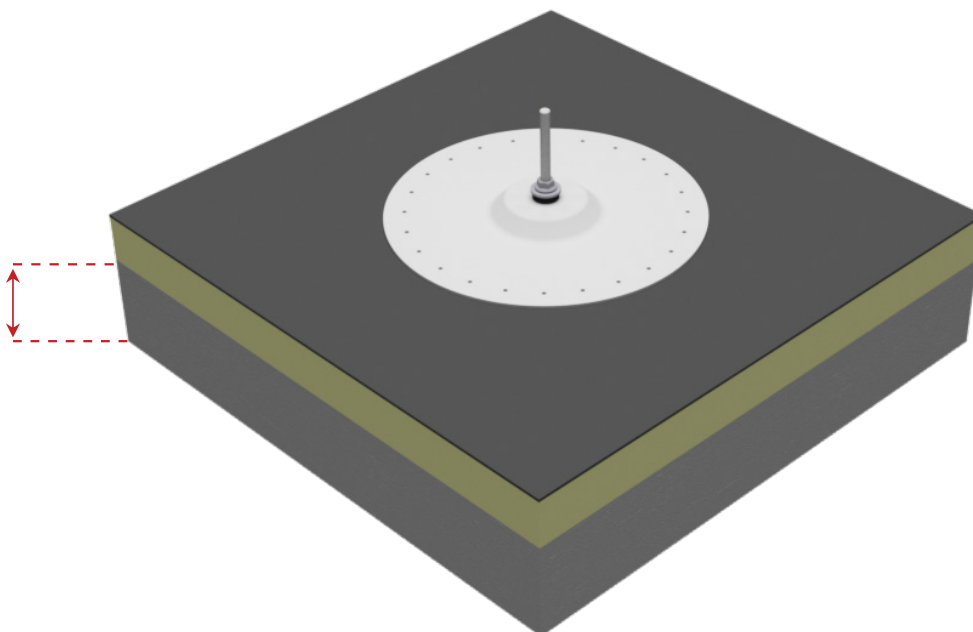

4


Needed amount of aerated concrete screws
- 6 separated over the holes

Height from top edge of
roof covering to top edge of
aerated concrete:
max 175mm

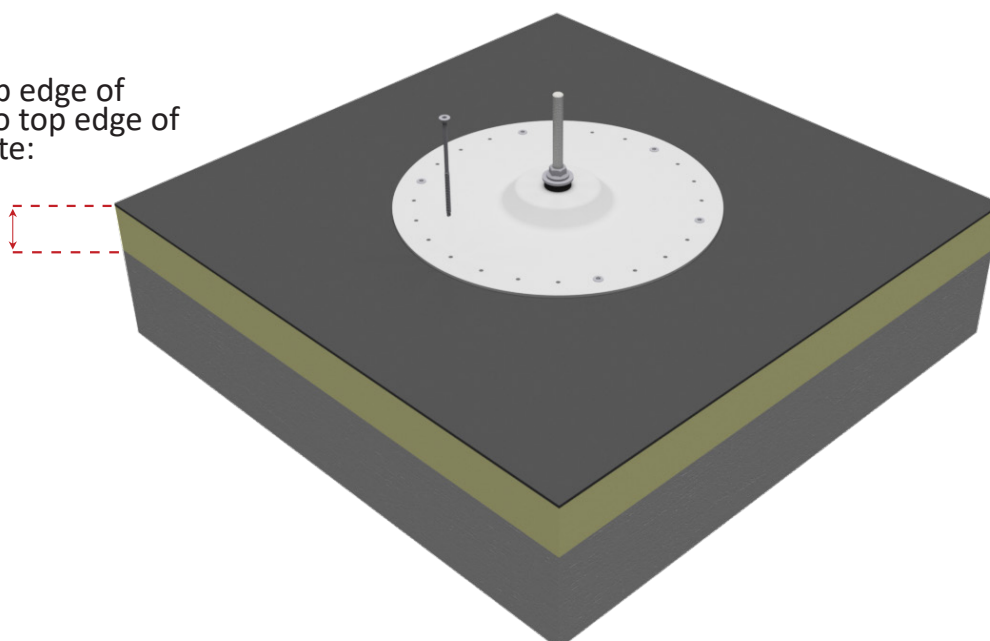


Recommended pierce length 60mm

Type of screw:
- 8mm lengths 65 up to 240mm

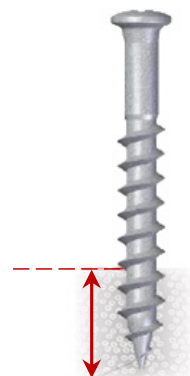


5

Use Torx Bit TX25

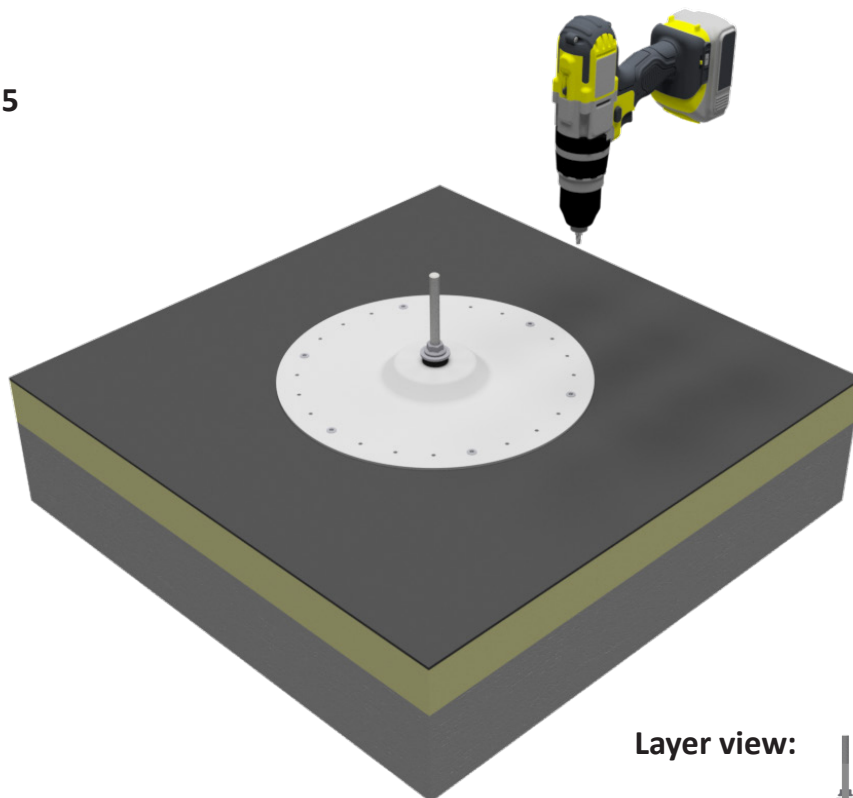

Layer view:

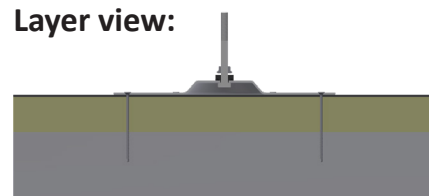


6

Advice installation membrane:



Advice size rosette:
- 540mm outer size
- 130mm inner size

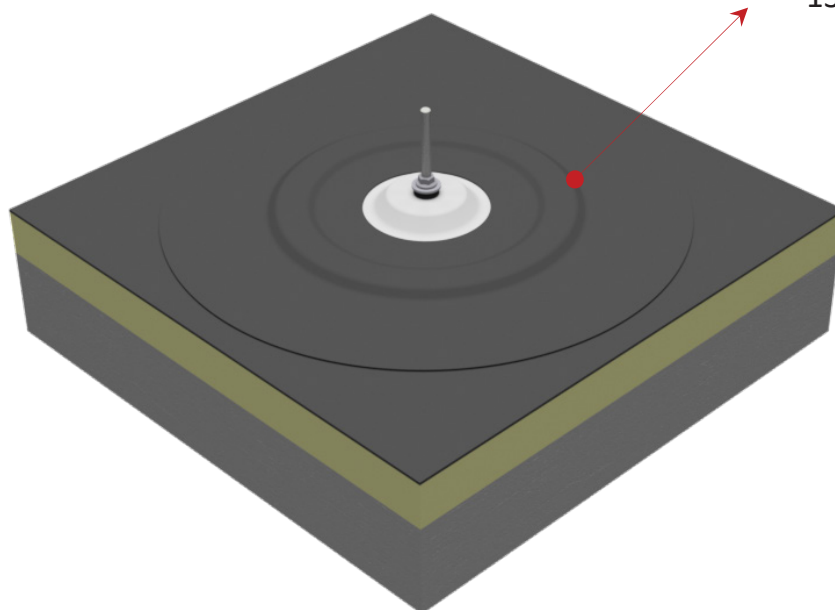

**For the watertight finishing of the consoles please contact your certified roofer.
Advise: first degrease the ValkSolarFix before making a watertight seal.**