


Installation manual ValkPitched Roof membrane

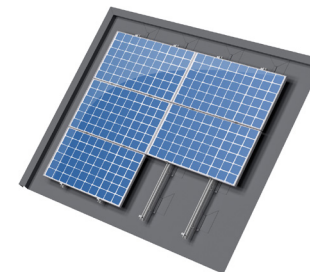

Installation manual Valk**Pitched** Roof membrane

Index

Disclaimer	Page 01
Necessary tools	Page 02
Mounting of bitumen roofhook	Page 03
Mounting Side++ profile	Page 04
Mounting coupling Side++ profile	Page 05
Mounting optional products	Page 06
Mounting panels	Page 07
Mounting cable clamp	Page 08

Pay attention

- This manual is not project specific.
- This manual is not legally binding.
- No rights may be derived from this installation manual.
- See **datasheet ValkCableCare** for cable management.
- The system is placed in the middle zone of the roof.





Disclaimer

This installation manual composed with the greatest possible care and contains specific information for correct and safe installation of the solar mounting system, including installation drawings and ballast tables, calculated according to the Eurocode regulations. The standard values used for input of these calculations, always need to be checked in advance by the installer for correctness. In case values are different, a project case specific calculation needs to be made. Please contact Van der Valk Solar Systems in this situation.

At all times all currently applicable structural, safety and building regulations must be observed prior to installation of the solar mounting system. The building in question will be subject to a load as a result of the solar mounting system installed/mounted. Solar mounting systems installed on roofs will be exposed to wind and snow loads. Therefore, you are at all times responsible to obtain and use a design calculation to establish whether or not the building will be able to withstand the (extra) load at all times. Where necessary, modifications need to be made by you. Van der Valk will not accept any form of liability upon you not having obtained and used such a required design calculation.

Mounting systems for PV-panels placed on flat roofs should either be mechanically attached to the roof or need to be supported by ballast, to make sure that the solar mounting system is unable to be lifted, tipped over or slide. The required ballast weight per system shown in the tables in this manual ensures that the mounting system can be installed and used safely. In case the inclination of the roofs is 5 degrees or more, the PV-mounting system must always be mechanically fixed to the construction of the roof.

The calculations do not take into account obstacles in the near surrounding such as, for example, high buildings, cliffs and mountains. Restrictions also apply for the position of the solar mounting system on a roof. The solar panels must be installed at a certain distance from the edge of the roof: the middle zone.

The standard warranty is 10 years, which can be extended under certain conditions. The guarantee provided is subject to the guarantee conditions stated in the general terms and conditions stipulated by Van der Valk Solar Systems B.V.. Our terms and conditions shall apply to all our products at all times and can be found on our website:

www.valksolarsystems.com

Van der Valk Solar Systems B.V. does not accept any liability for any direct and/or indirect consequences of any act (or omission) ensuing from the information in or failure to observe the instructions provided in this installation manual. The use of the installation manual will at all times be subject to Dutch law.

Van der Valk Solar Systems holds the right to amend this document without further notice.


The ValkPitched mounting system is a product of:

Van der Valk Solar Systems BV

Netherlands Chamber of Commerce: 27355116

www.valksolarsystems.com


Necessary Tools For ValkPitched - Roof membrane

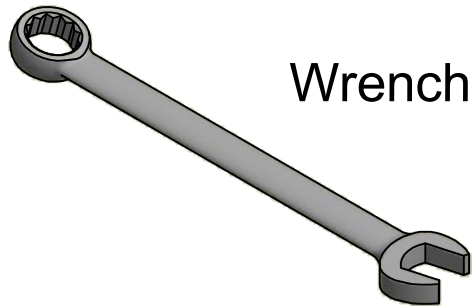


Wrench 13



Socket 13




Torx bit T30

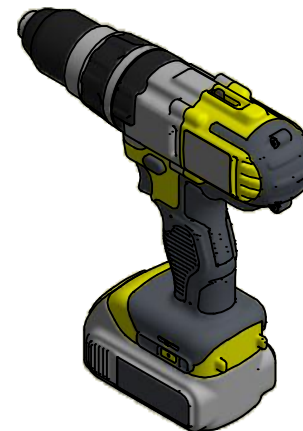

Cordless drill
(for socket 13
and Torx bit T30)

Mounting of the bitumen roof hook

VAN DER VALK

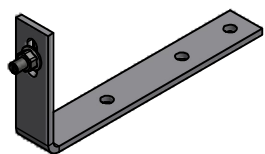


74.78.79




77.33.60

Not included:

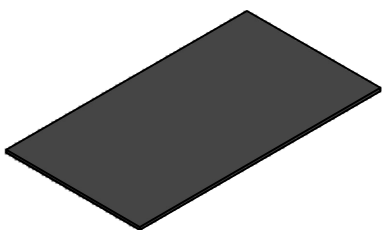


Detail A


Use 2 of 3 holes

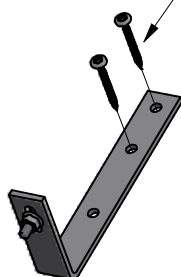


Detail A

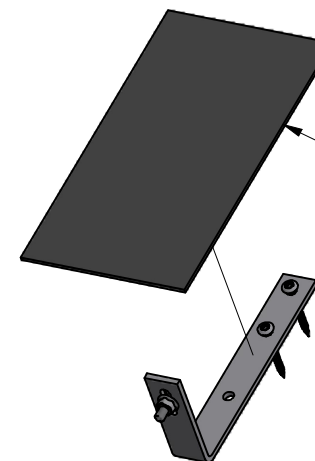

Heat weld a flap of roof membrane on the roof anchor, for a watertight seal.

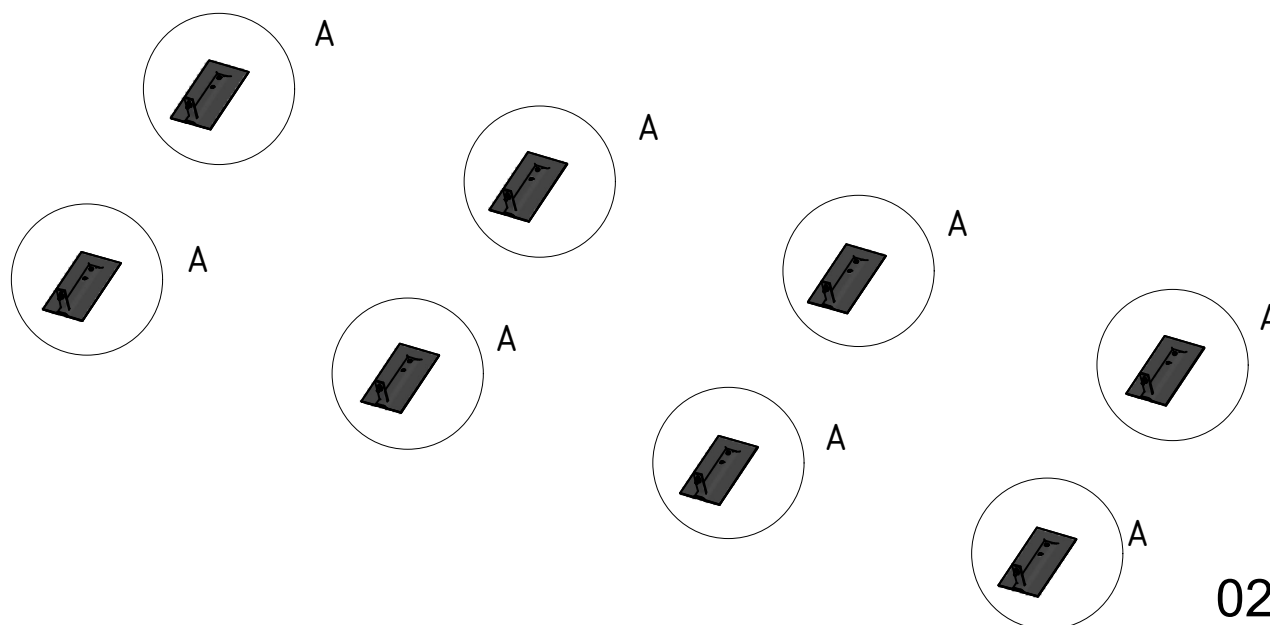

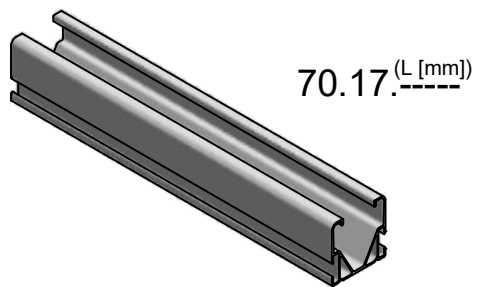


Mounting Side++ profile


VAN DER VALK




Detail A

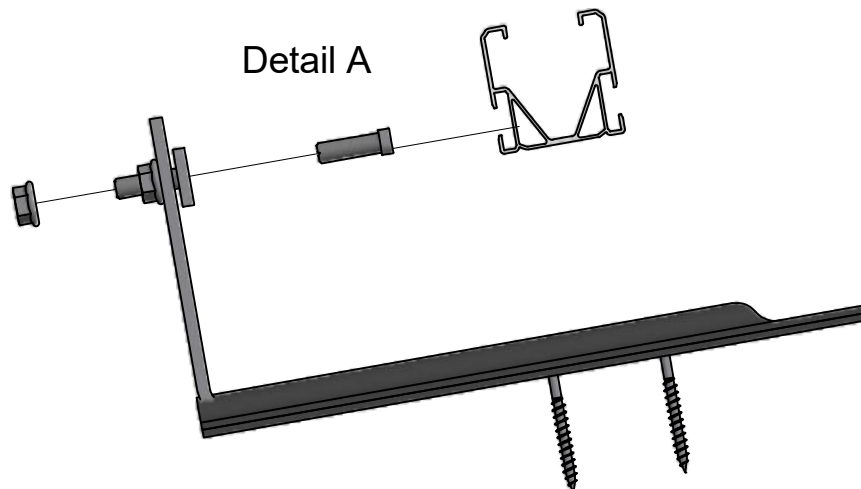


Detail B

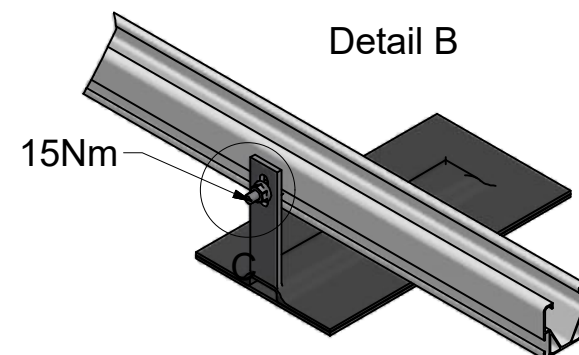

Detail C

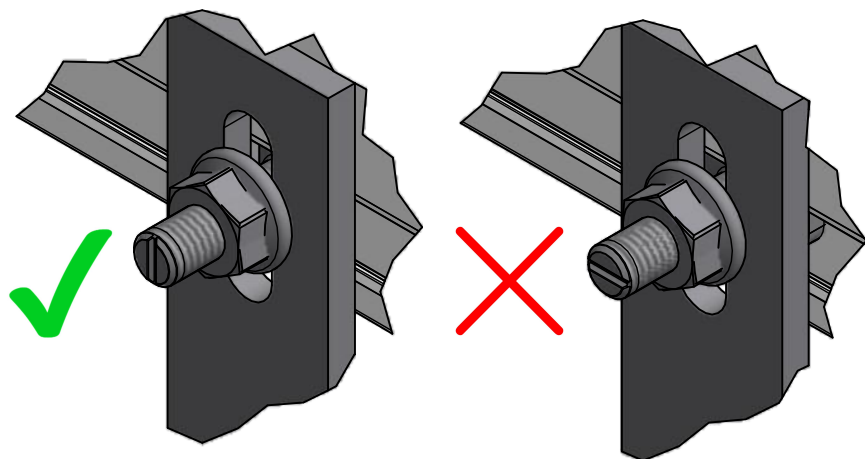

The groove of the bolt corresponds with the orientation of the bolt head.

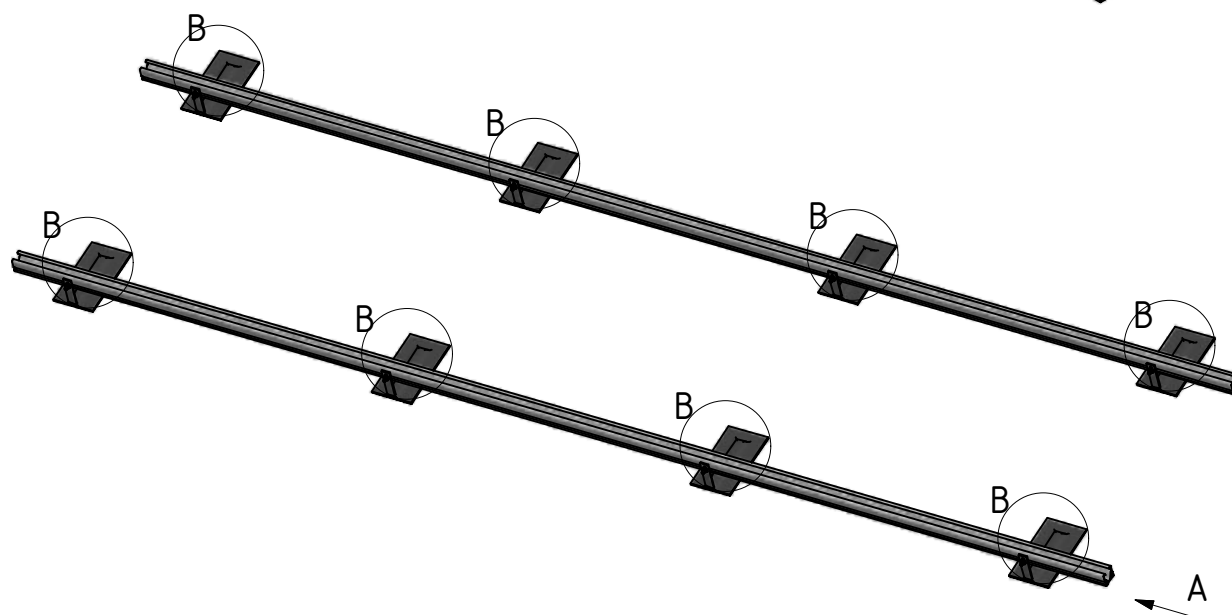


Mounting coupling Side++ profile


VAN DER VALK




72.48.63

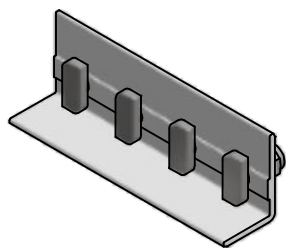




Detail A

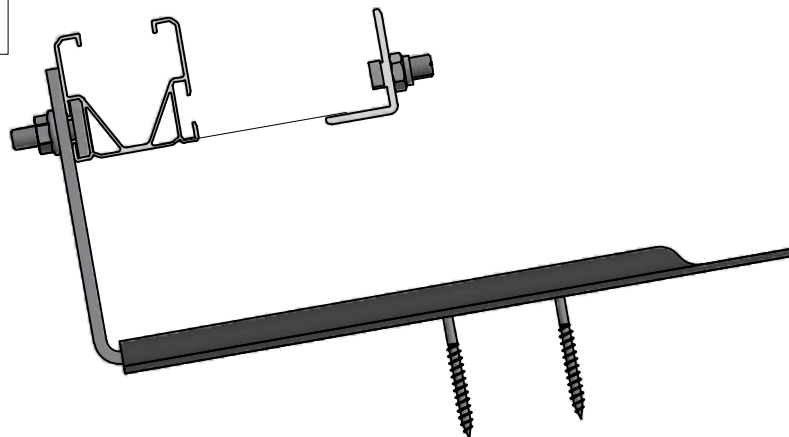

Detail A

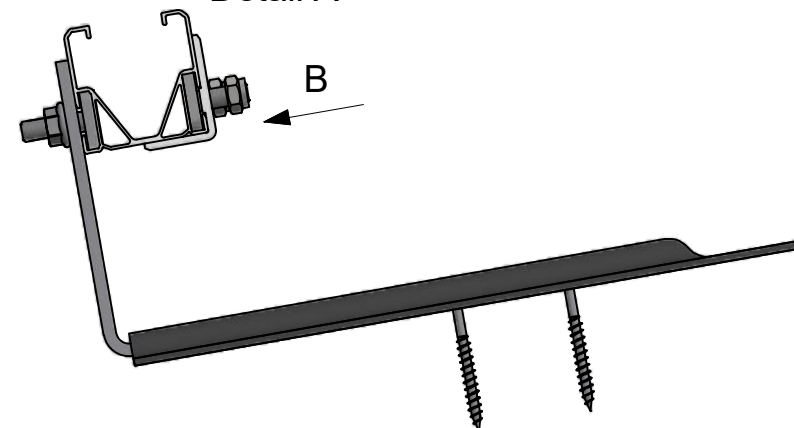


Detail B

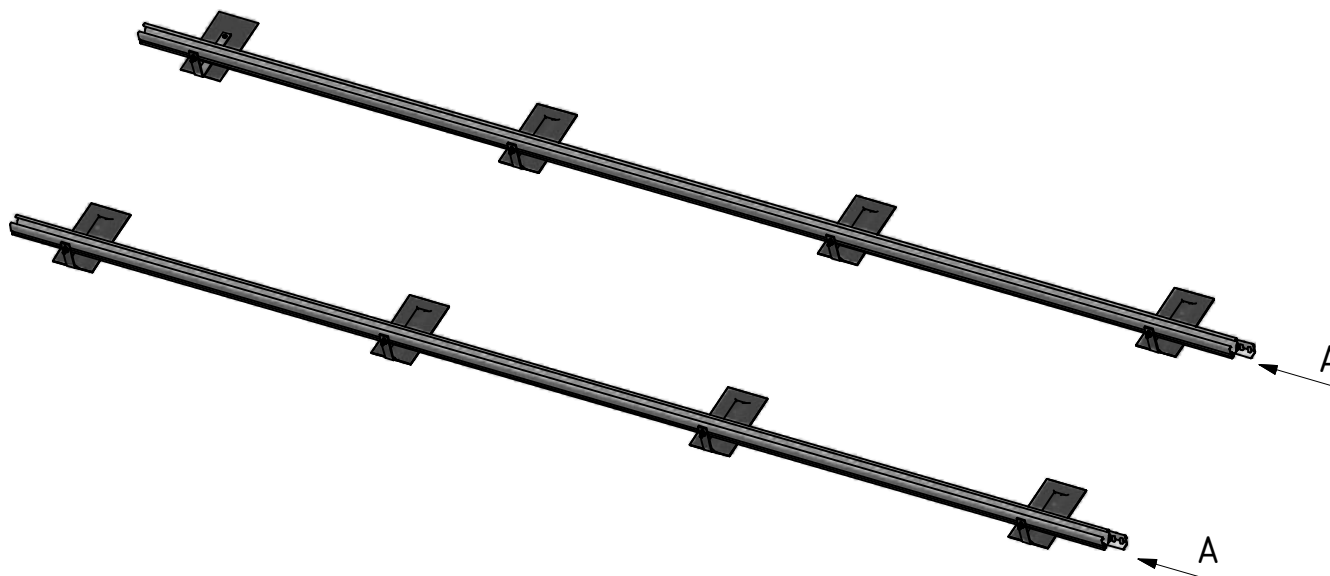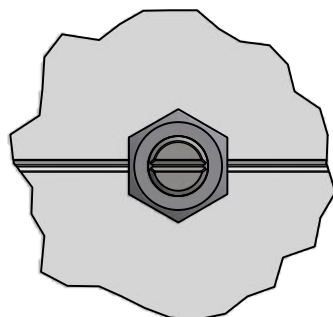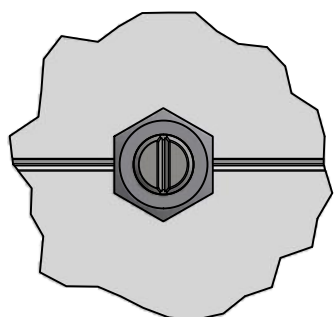

The groove of the bolt corresponds with the orientation of the bolt head.

Optional:

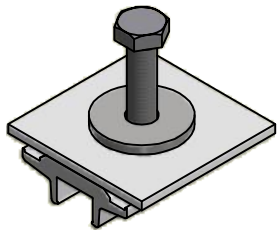


77.42.23

Optional:



73.30.20


Optional:



73.90.52

Mounting optional products


VAN DER VALK

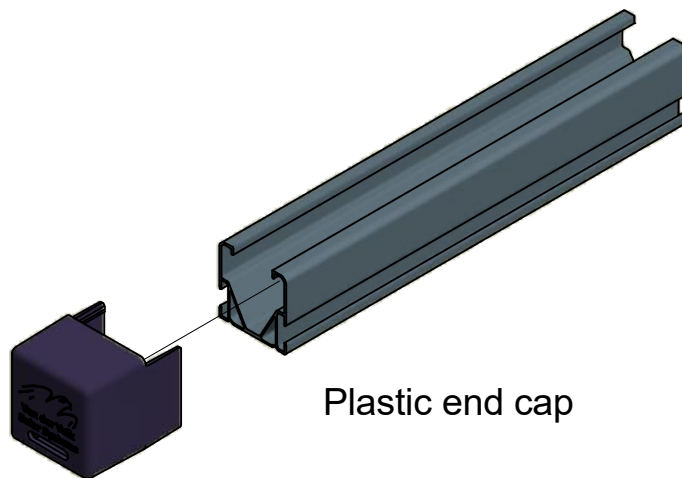




Plastic end cap


Alu. micro-inverter clamp

10Nm

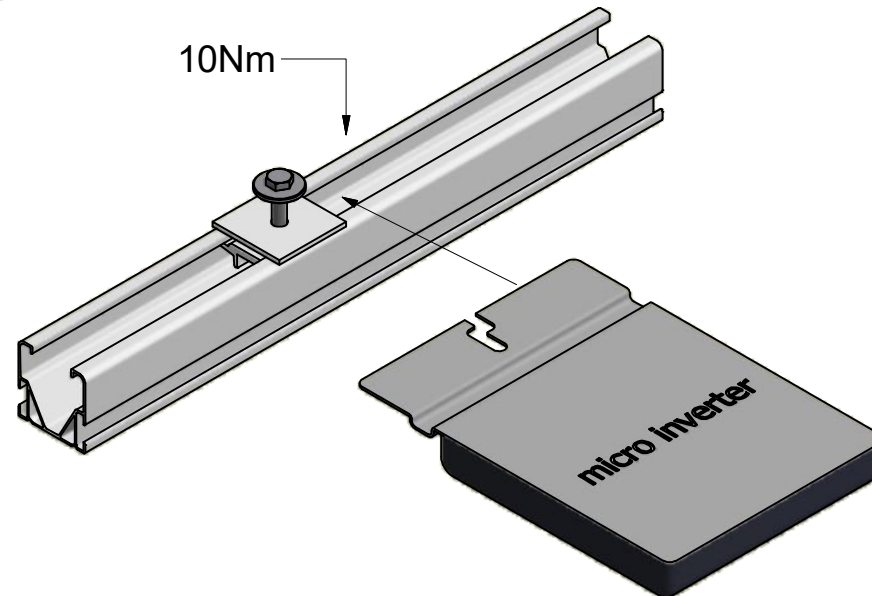

Plastic panel alignment pin

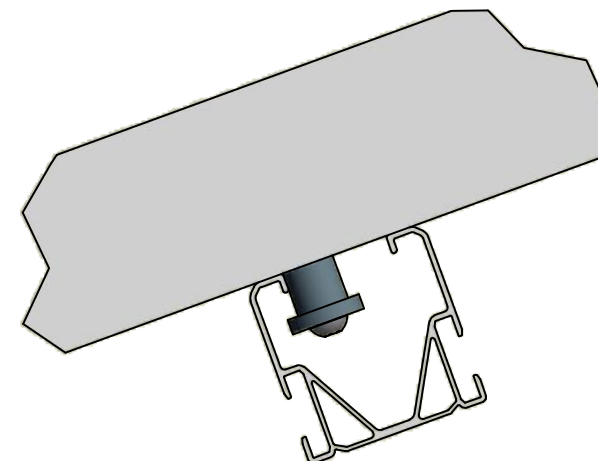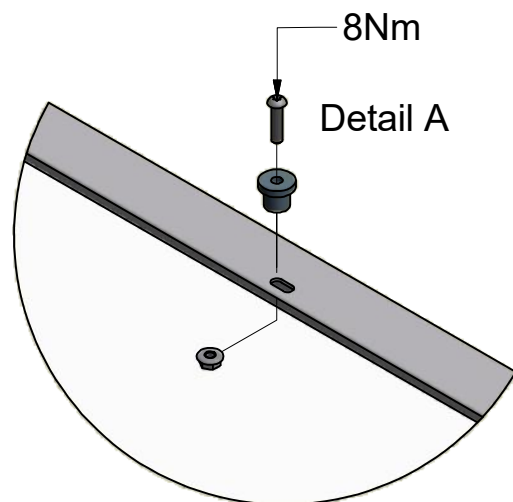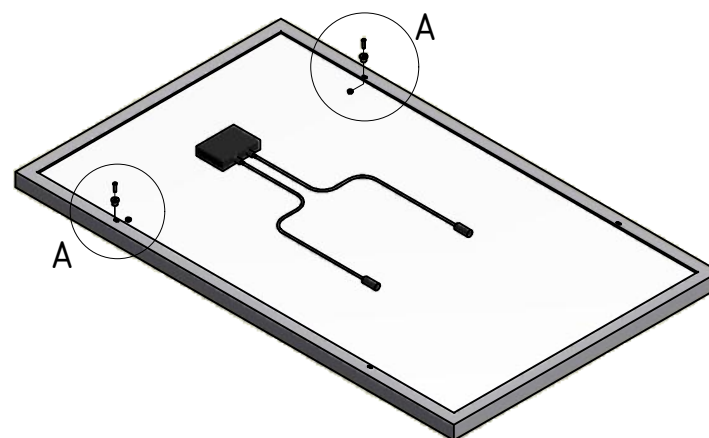





72.15.52

Mounting panels


VAN DER VALK

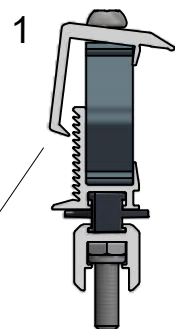

Take the end clamp out of it's slot to make the assembly easier.

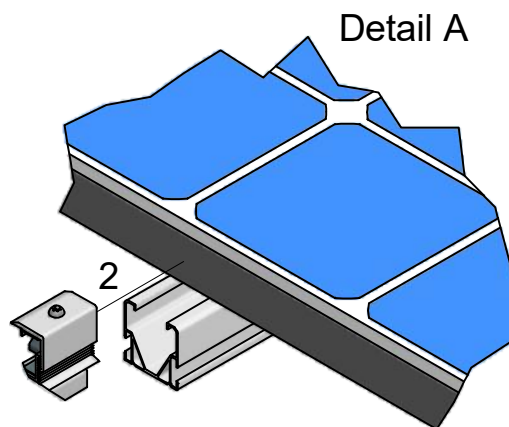


Detail A

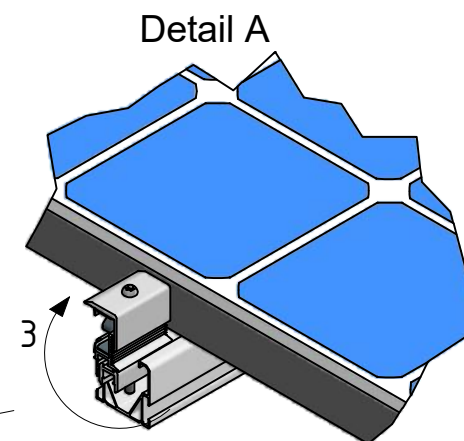

Detail A

The end clamp can only be turned clockwise.

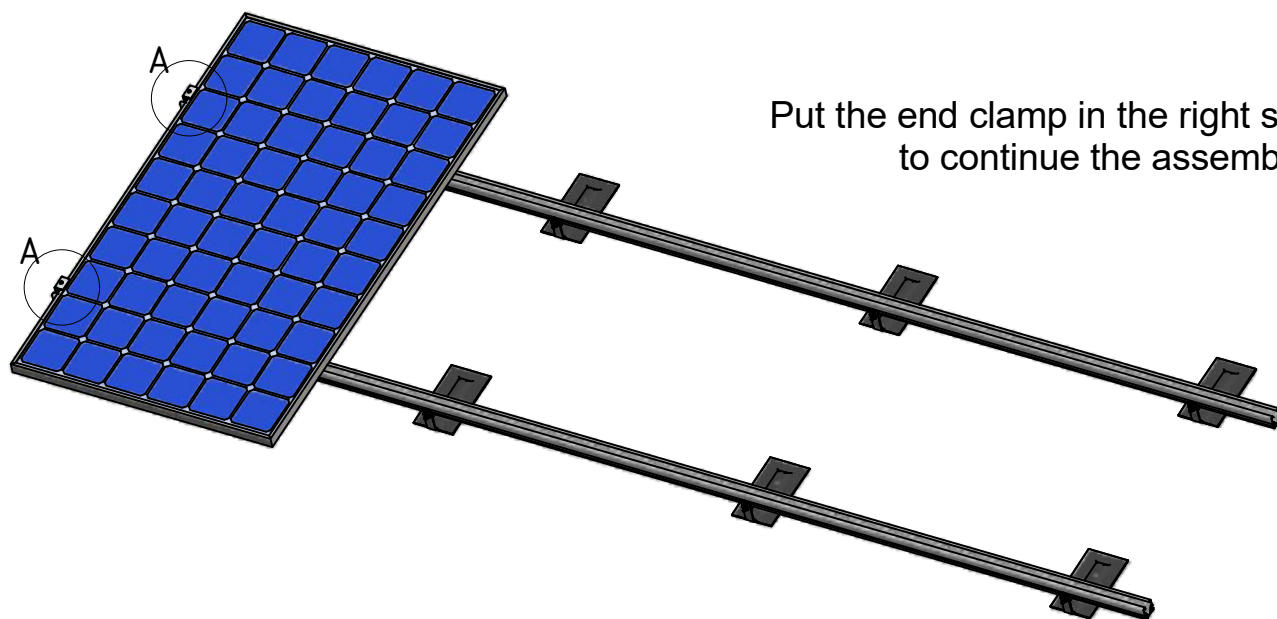



Put the end clamp in the right slot to continue the assembly.



6-7Nm

Detail A



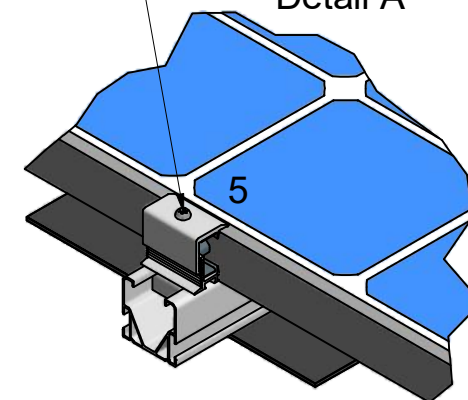




72.15.50

Mounting panels

VAN DER VALK

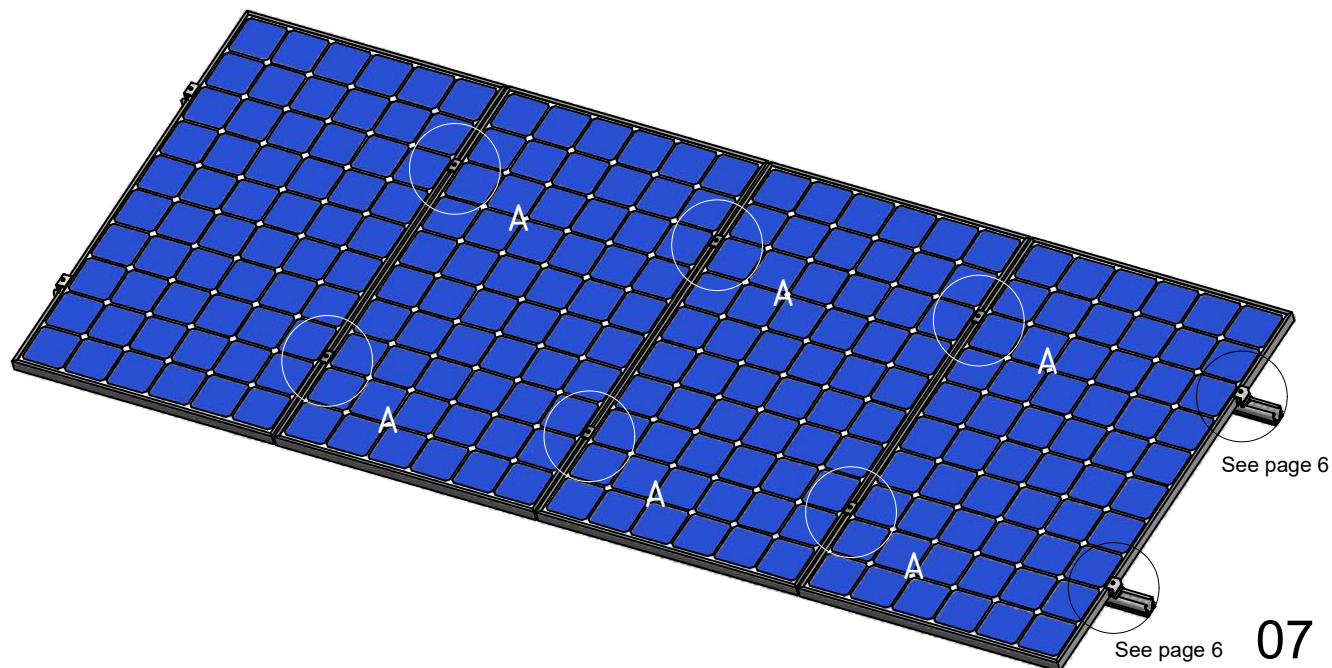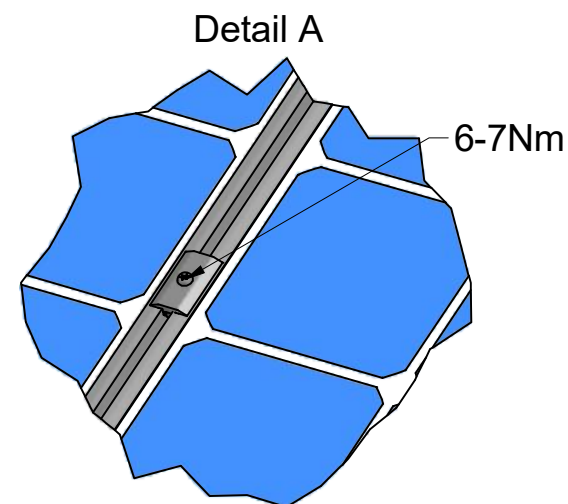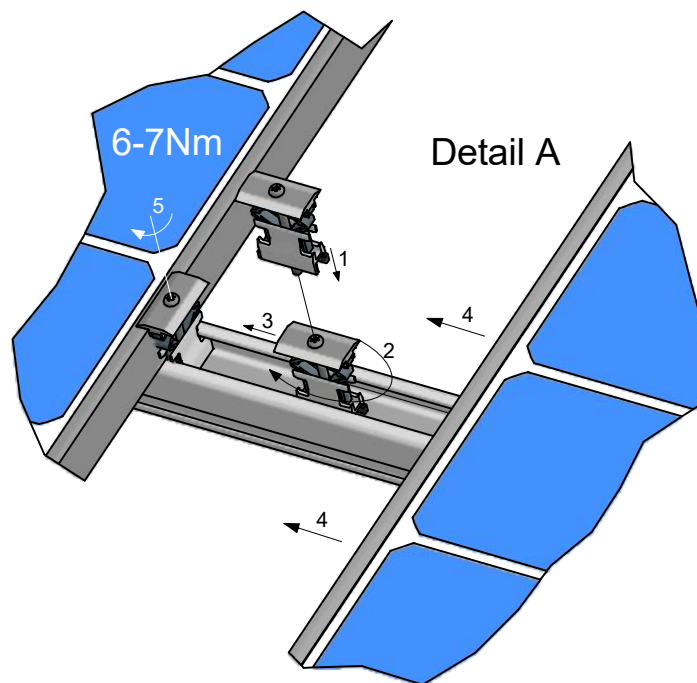


See page 6

See page 6

Optional:




73.20.01
max. cable
diameter Ø9 mm

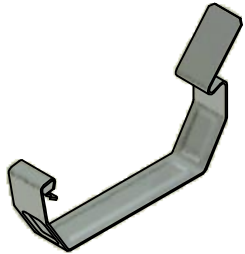




73.20.05
max. cable
diameter Ø9 mm

Mounting cable clamp




Mounting cable clamp on panel.

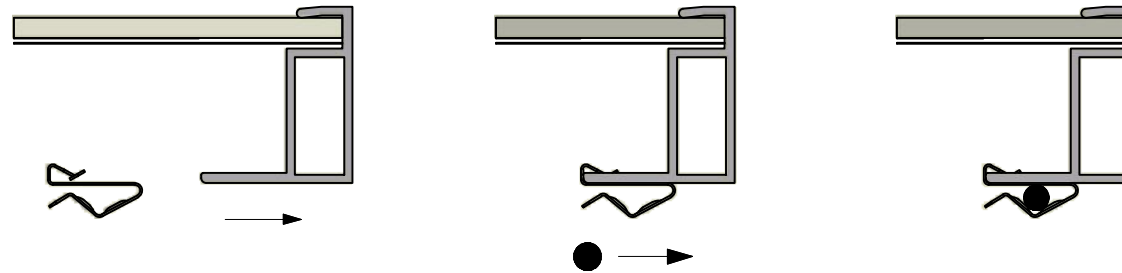

Mounting cable clamp on side profile.

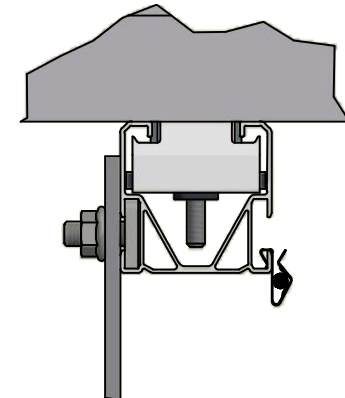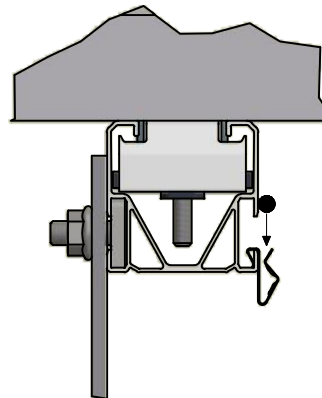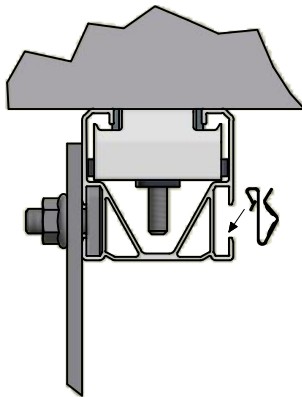

Mounting cable clamp on side profile.

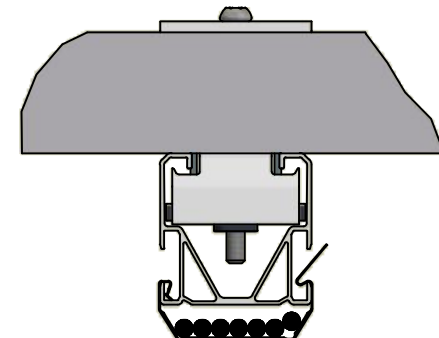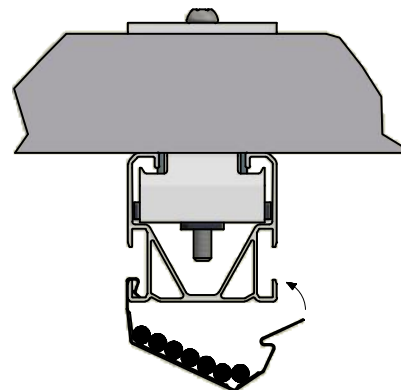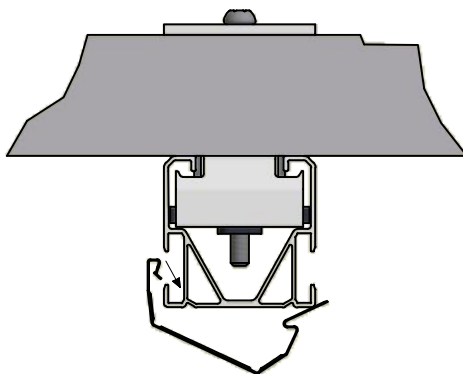

VAN DER VALK

