




Datasheet **Load distributor**

Load distributor

The load distributor is developed to reduce the point load per ballast point and enable the ValkPro+ system to be used on a wider scale of roofs.

Article information

Material number	729634
Description	Load distributor ValkPro+
GTIN code	08719632527817
Image	
Dimensions	378x127x27 mm
Weight	0,15 Kg per pc
No. of pcs per box	25 pcs

Point load

Point load reduction of the ValkPro+ Max system per ballast point		
Number of load distributors per ballast point	Reduction of point load for ValkPro+ South	Reduction of point load for ValkPro+ East-West
0	0%	0%
1	72%	56%
2	84%	72%
3	88%	79%

Application


To be applied to ballasted ValkPro+ systems on roofs, which have a limitation of the allowable point load for the tile carrier.

Can be used on any ballasted ValkPro+ system:

- L10 South and East-West
- L15 South and East-West
- P10 South and East-West
- South and East-West Max

Suitable for **all types** of roofing materials.


CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS

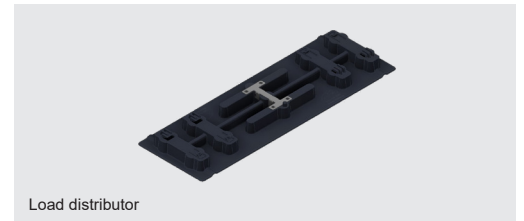

Datasheet **Load distributor**

Application

The load distributor is easily attached to the roof carrier profile.

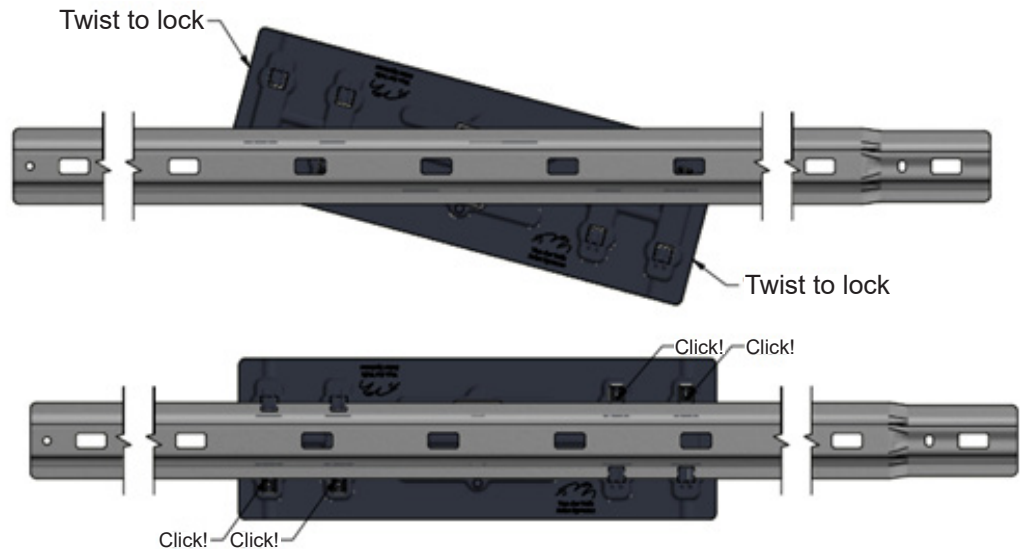

Material

- Recycled polypropylene
- UV resistant
- Suitable for temperatures from -20°C to +60°C

CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS