


VAN DER VALK




Quick Guide

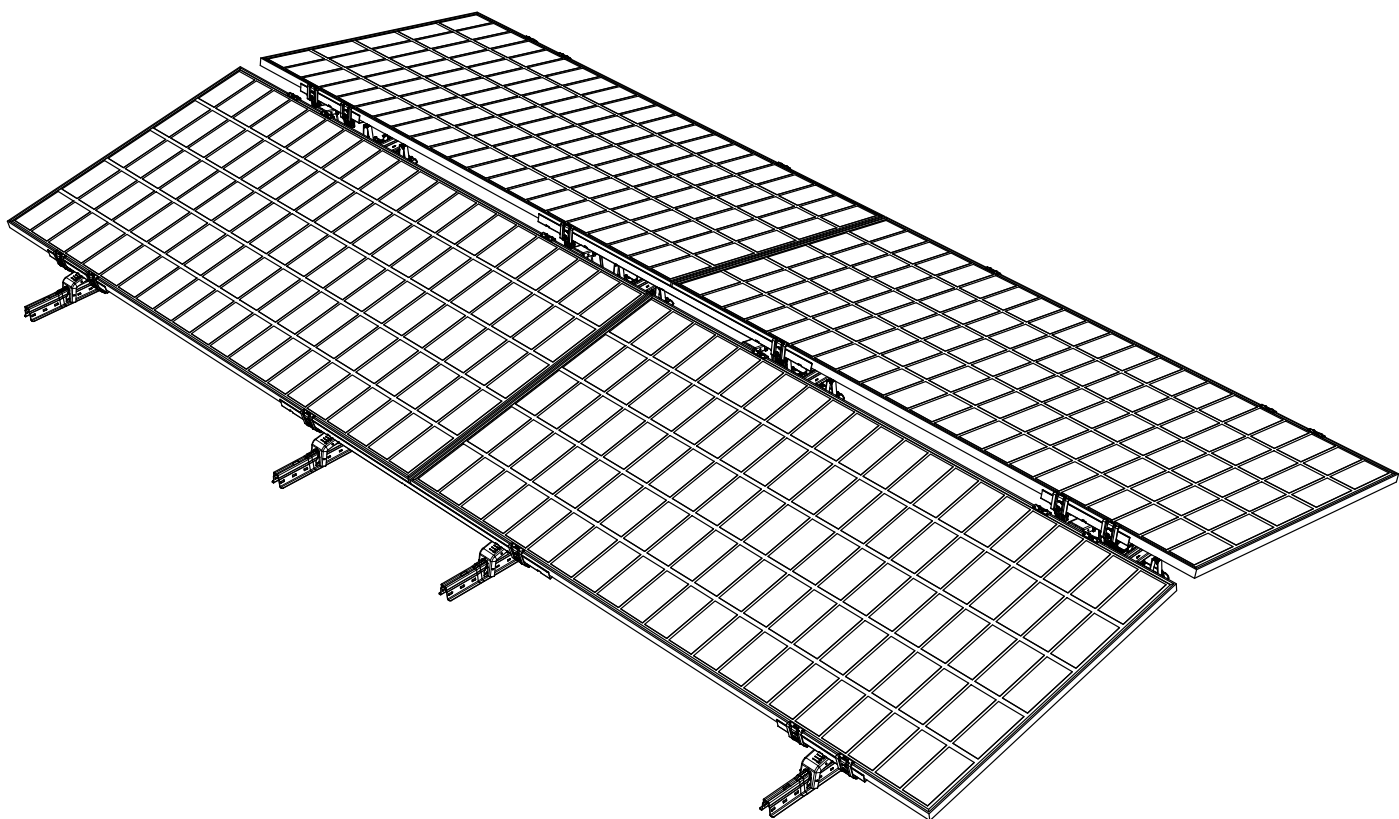


ValkPro+ Max NextGen


1

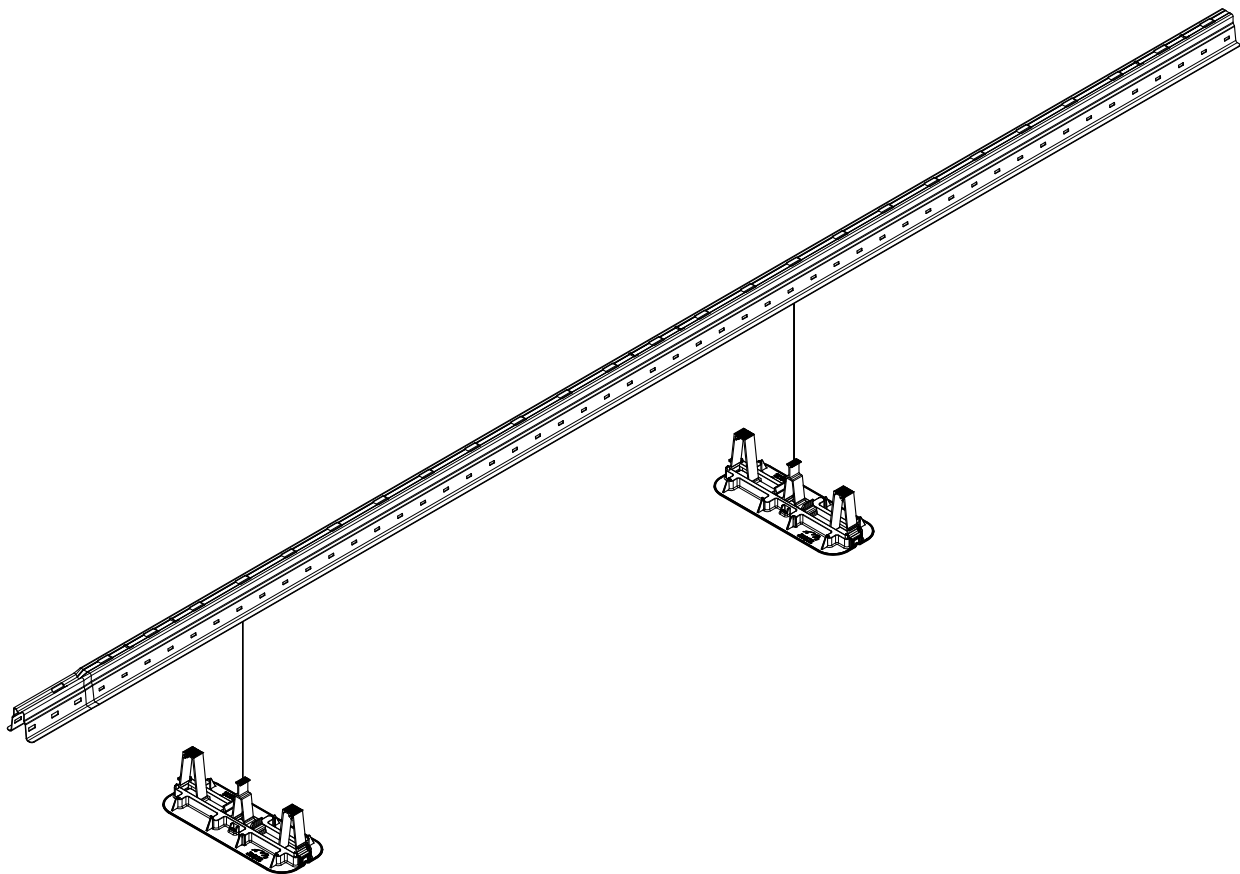


2



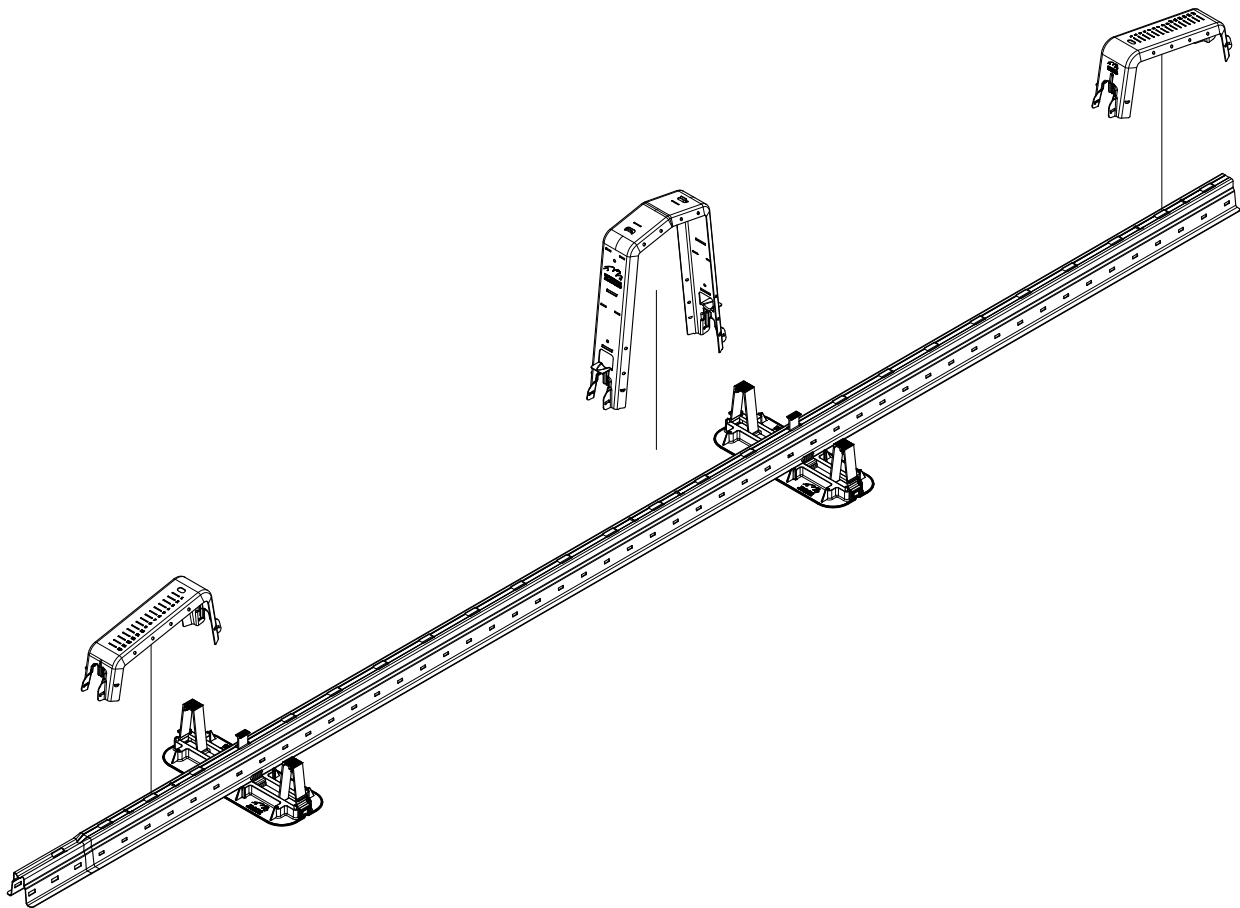


3

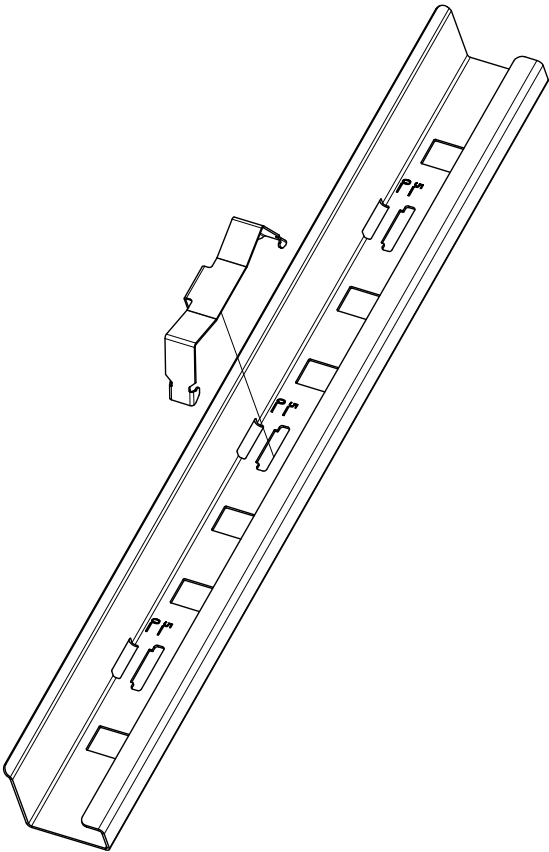


4

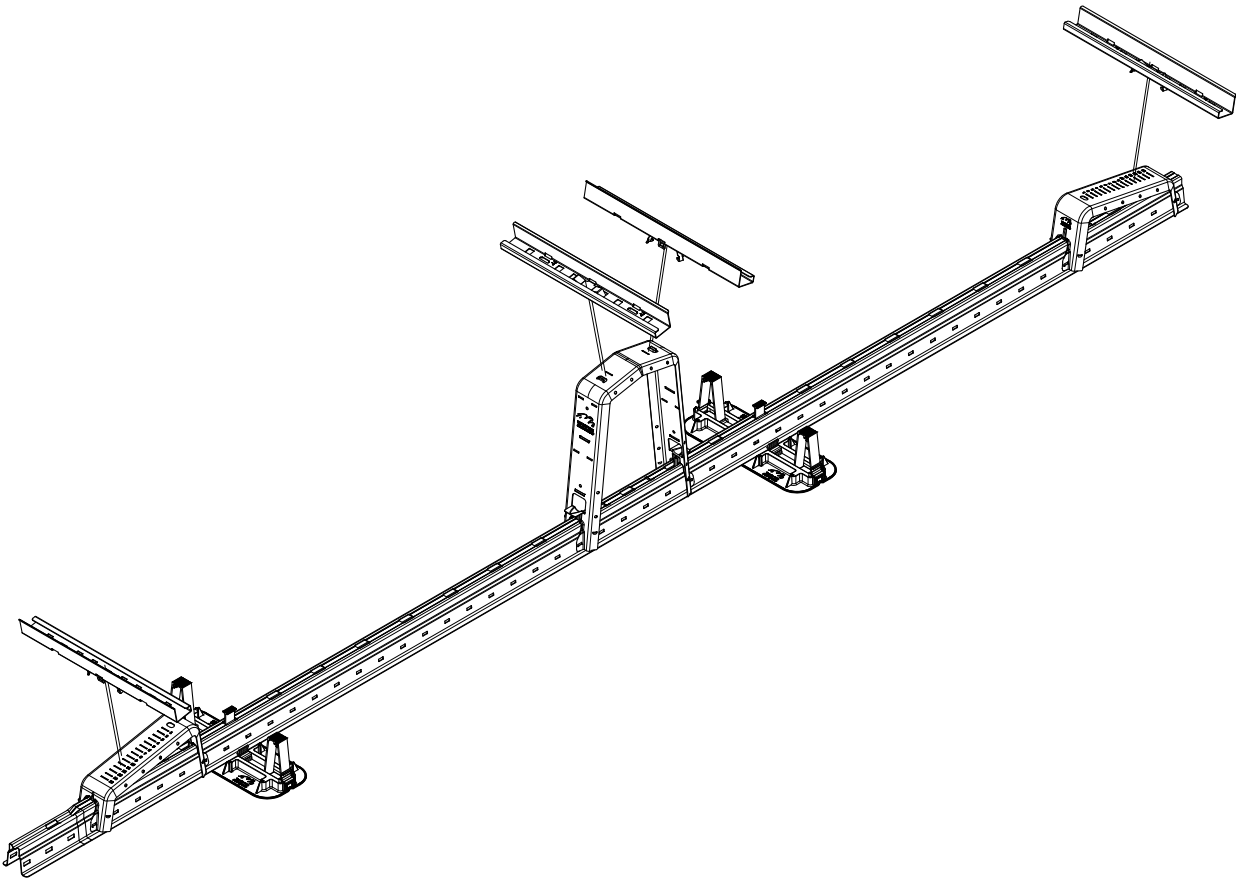

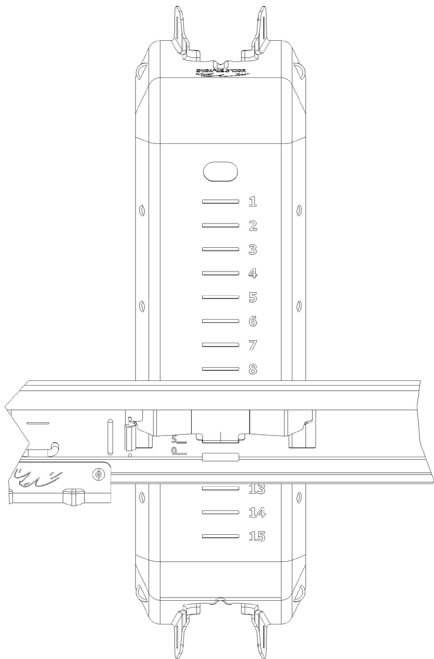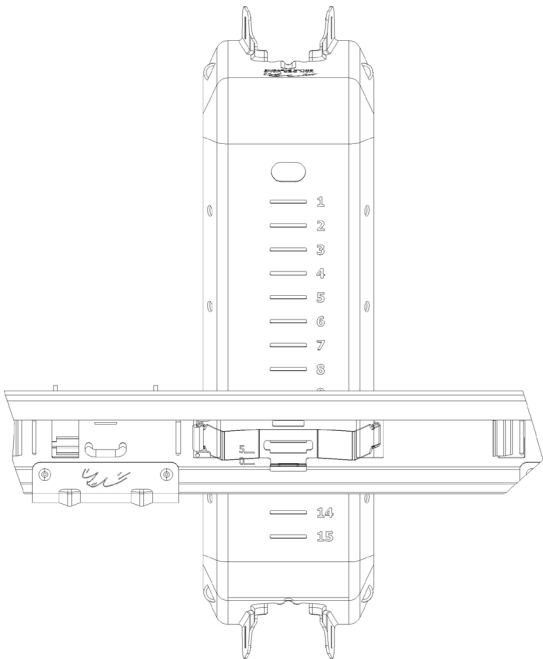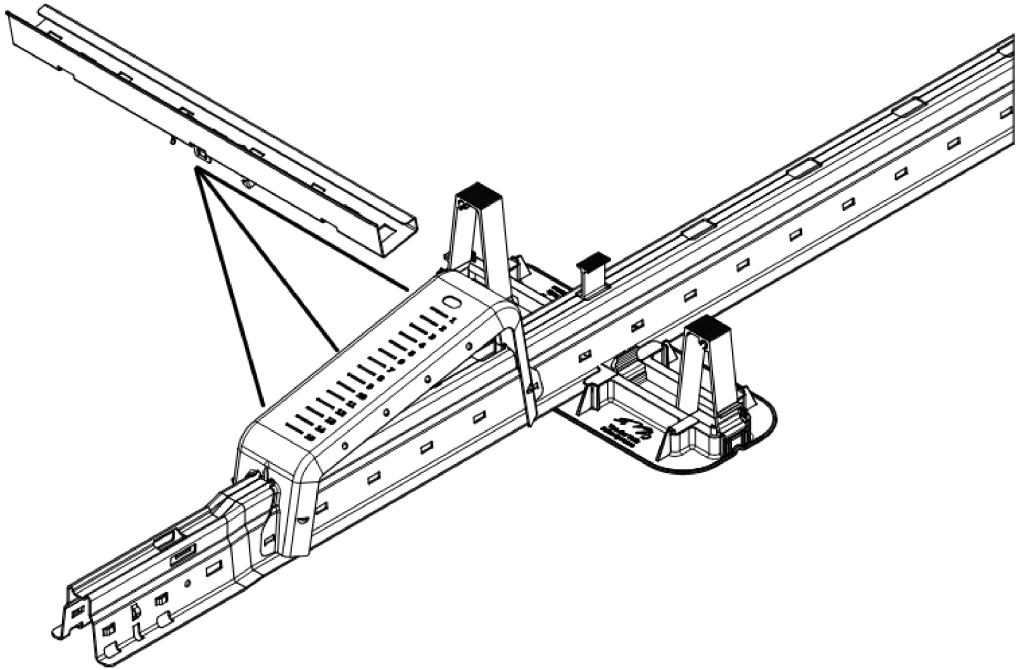


Lenght roof carrier	Panel width	Position Connection clip in Front base	Position Connection clip in lower end/connection profile	Walking path E-W
2500/1500 mm	1134 mm	12	0	163 mm
2700/1600 mm	1134 mm	2	0	363 mm
2900/1700 mm	1303 mm	9	5	372 mm


5a

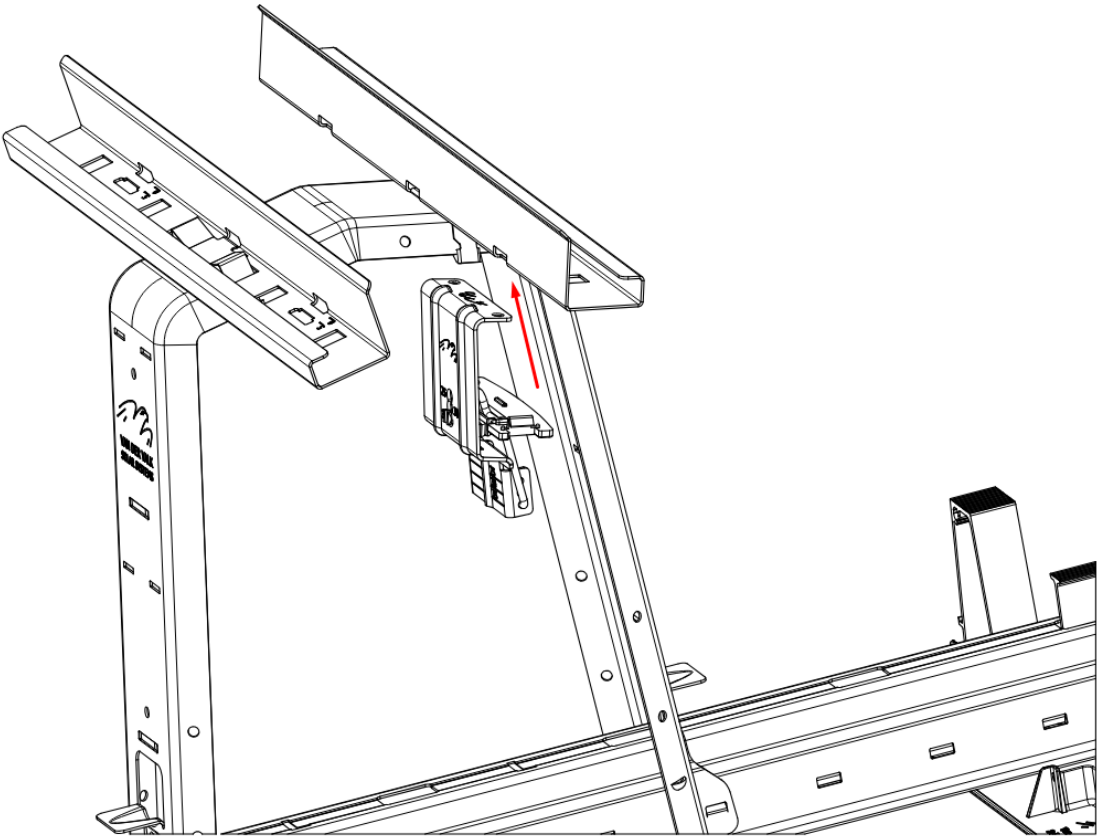

5b

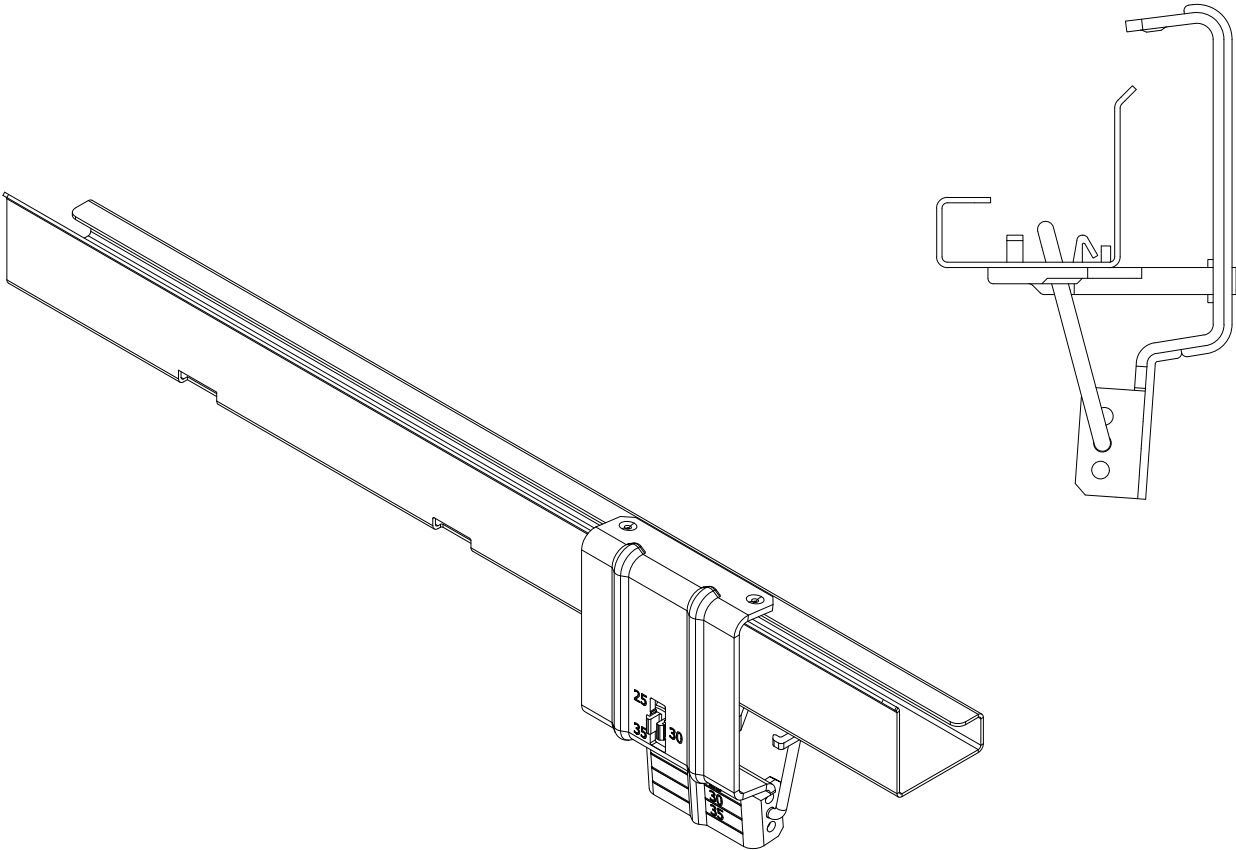


6

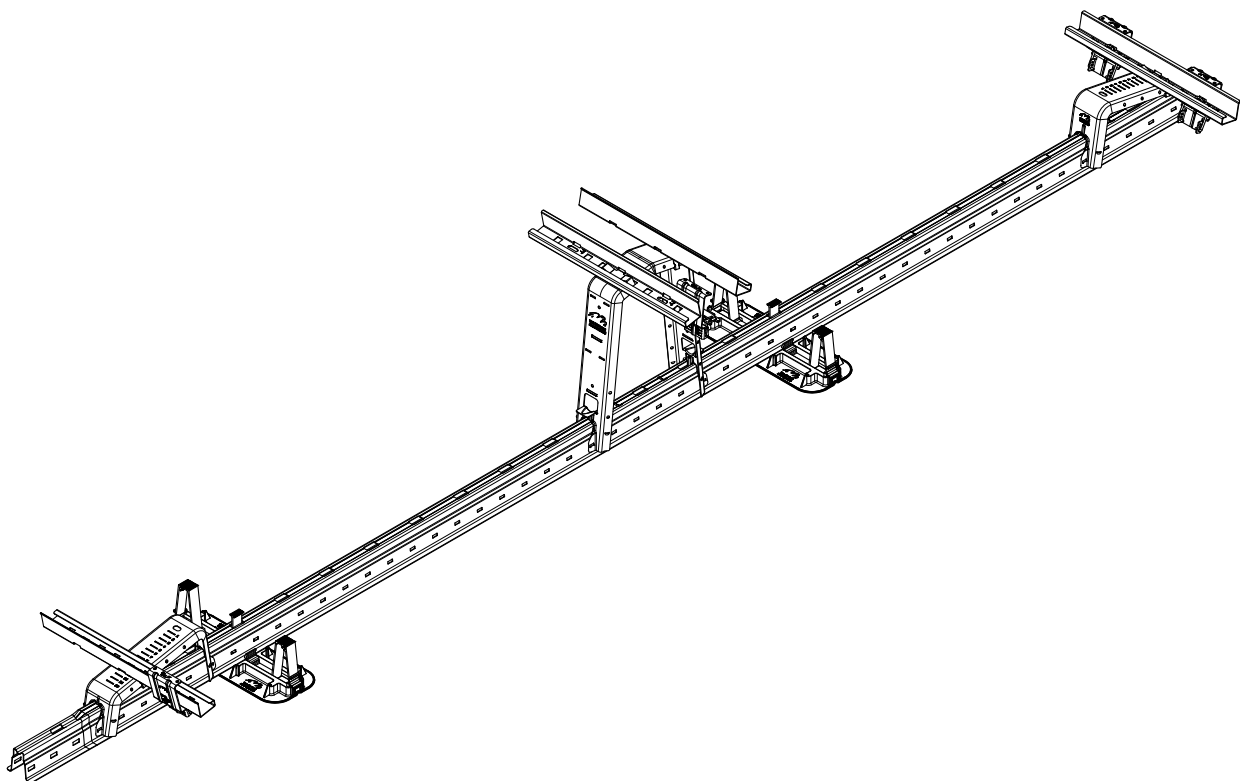


7

74160xxxx

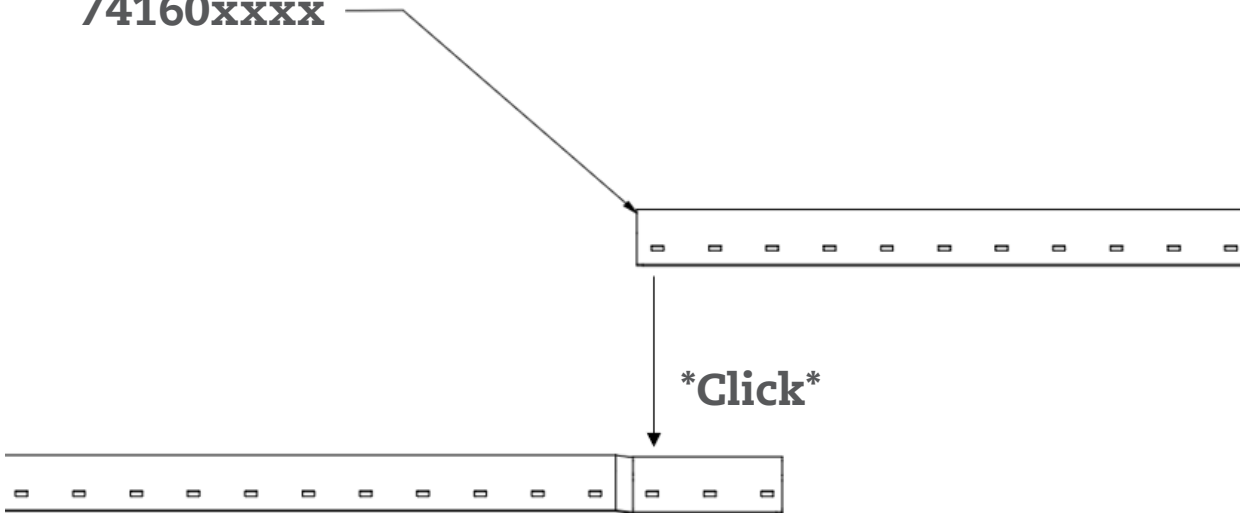

8a

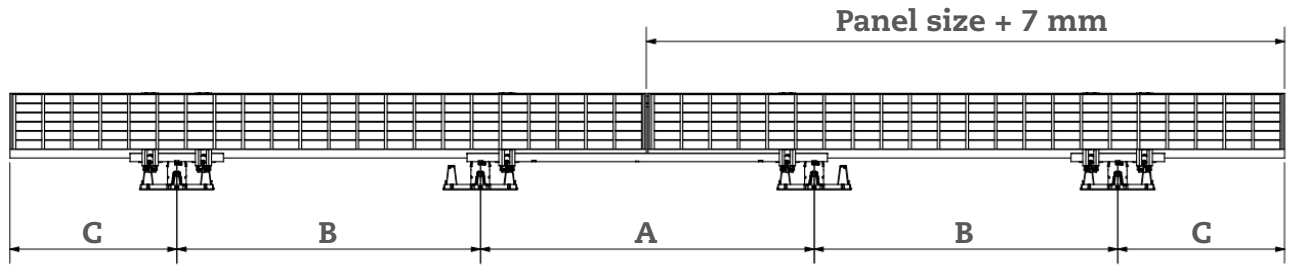


A = Pitch of connection profile

1. 850mm - For panel length between 1700mm - 1900mm
2. 1050mm - For panel length between 1901mm - 2100mm
3. 1250mm - For panel length between 2101mm - 2500mm

B = Panel length + 7mm - **A**


C = $\frac{\text{Panel length} - \text{B}}{2}$

8b

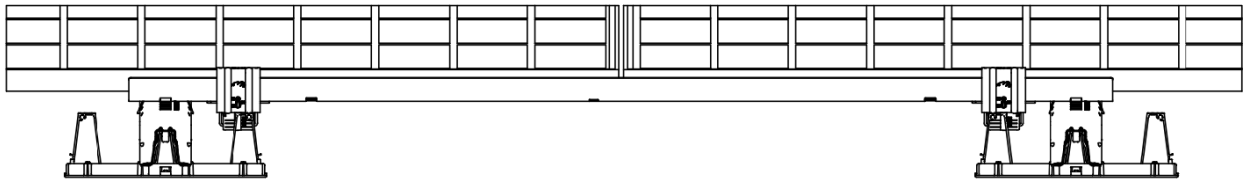


Panel length 2101-2500mm - 1250mm

8c

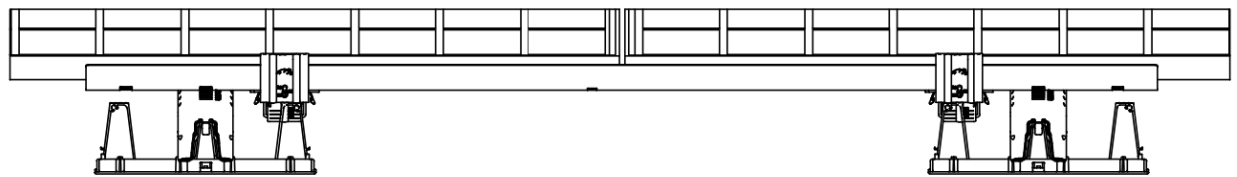


Panel length 1901-2100mm - 1050mm

8d

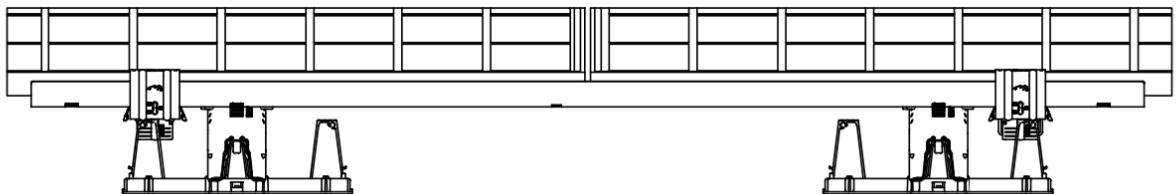


Panel length 1700-1900mm - 850mm


9

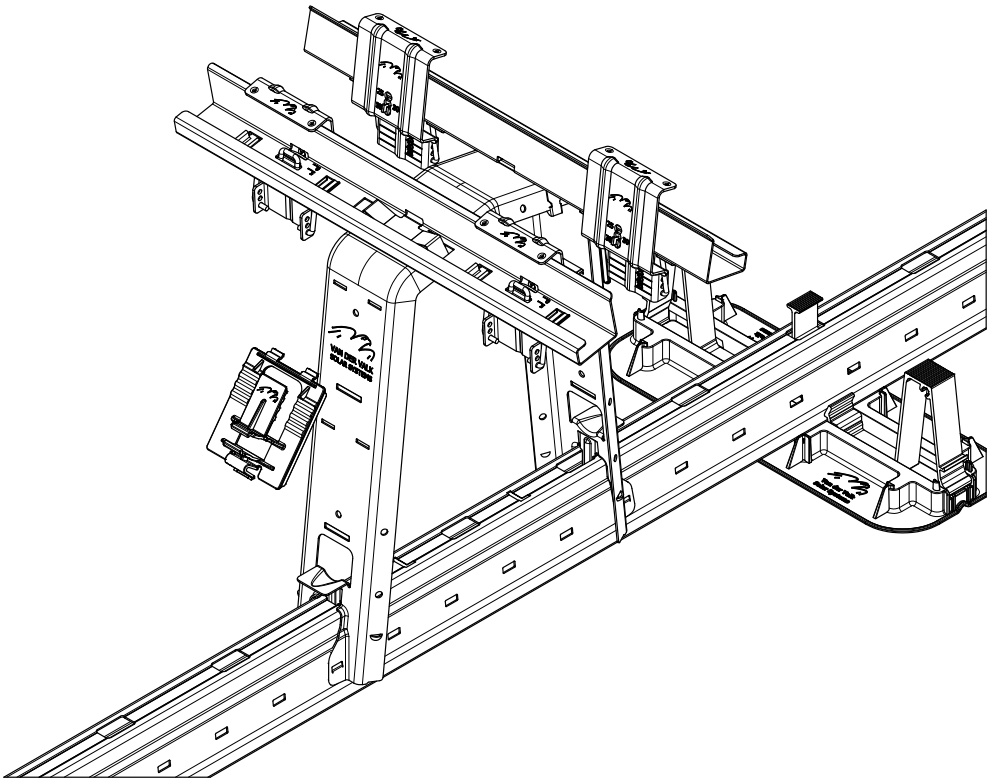


10

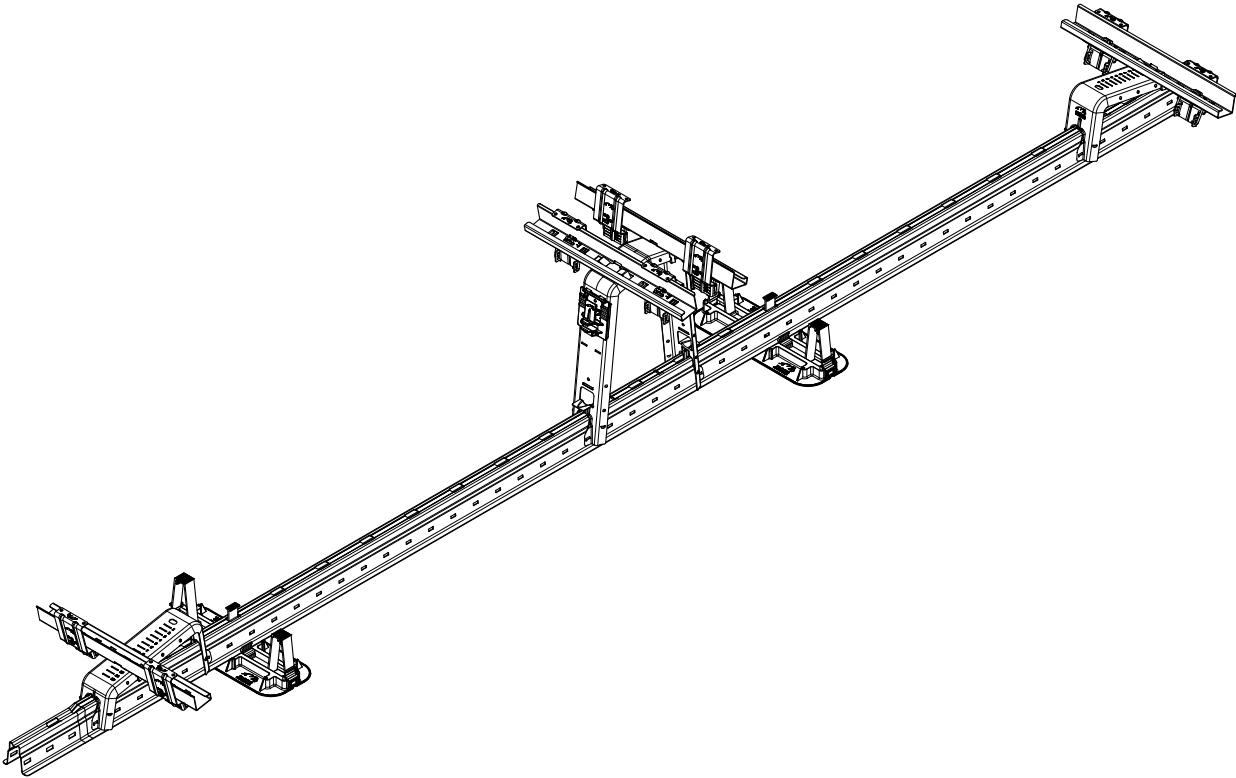


11

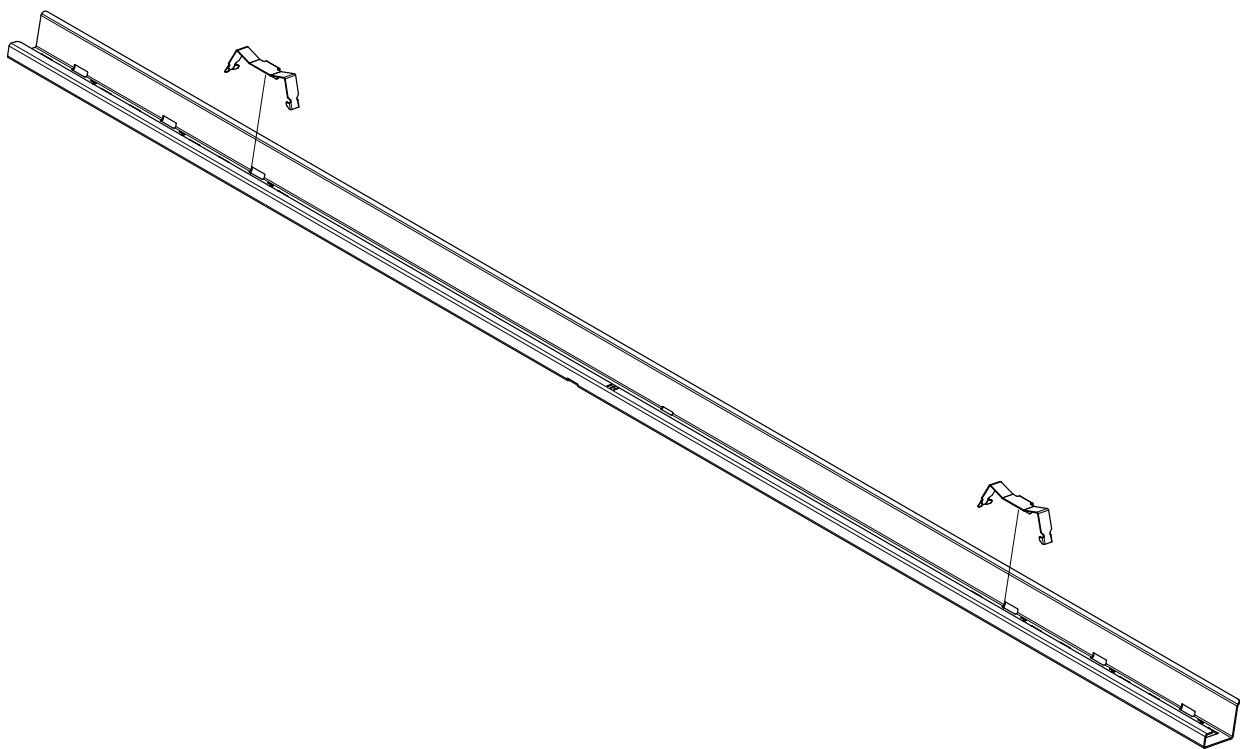


12

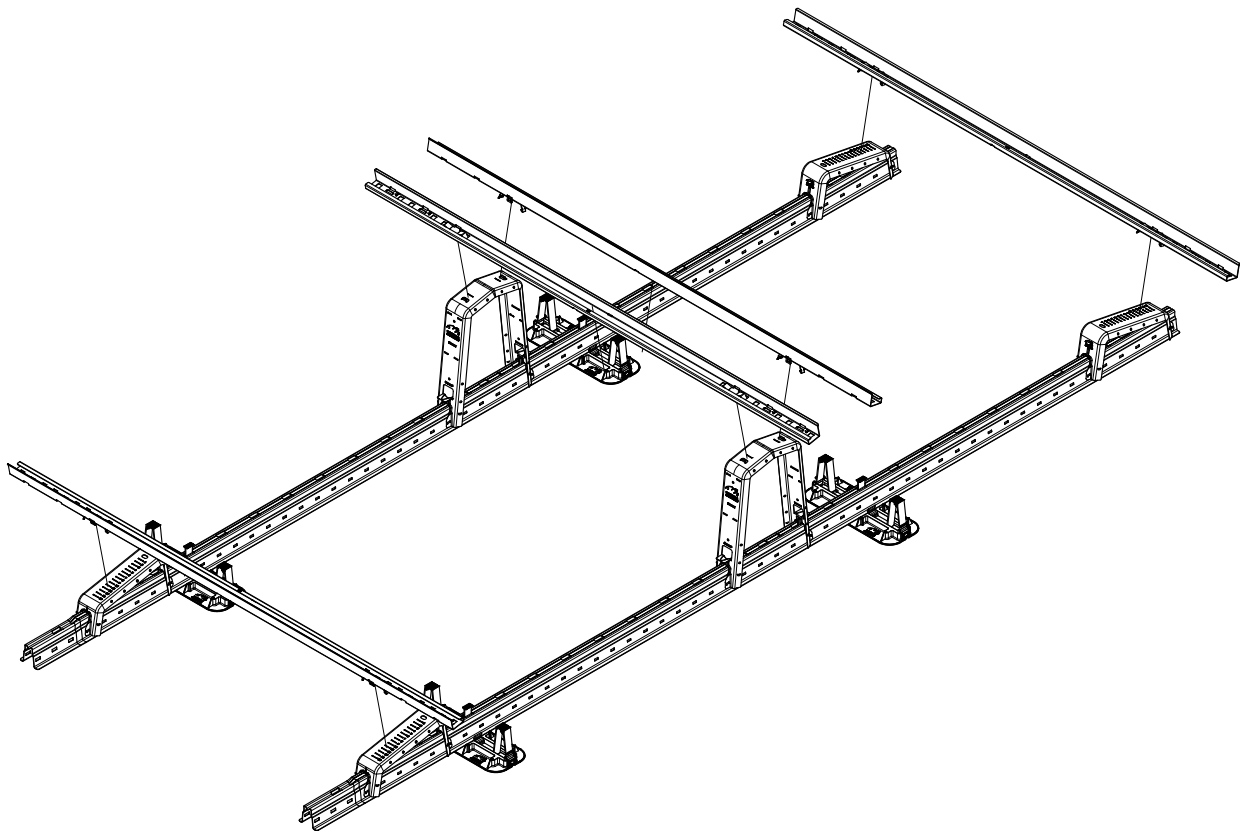



13

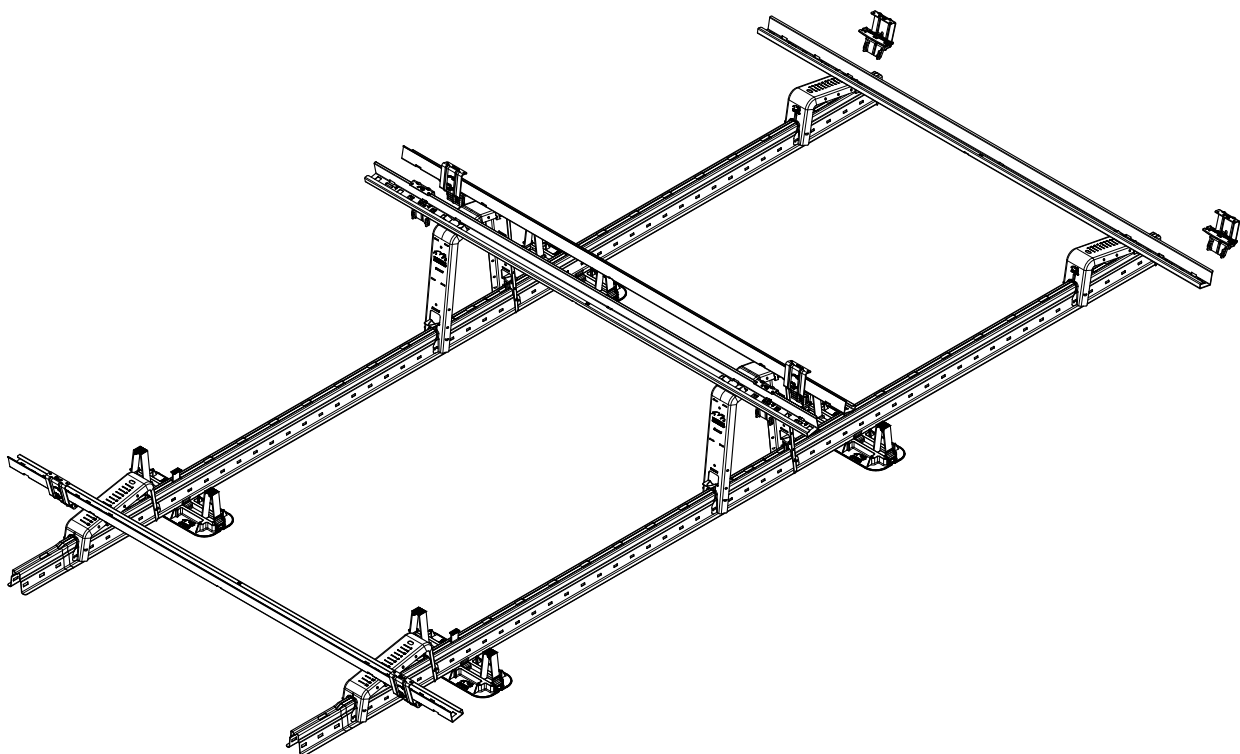


14

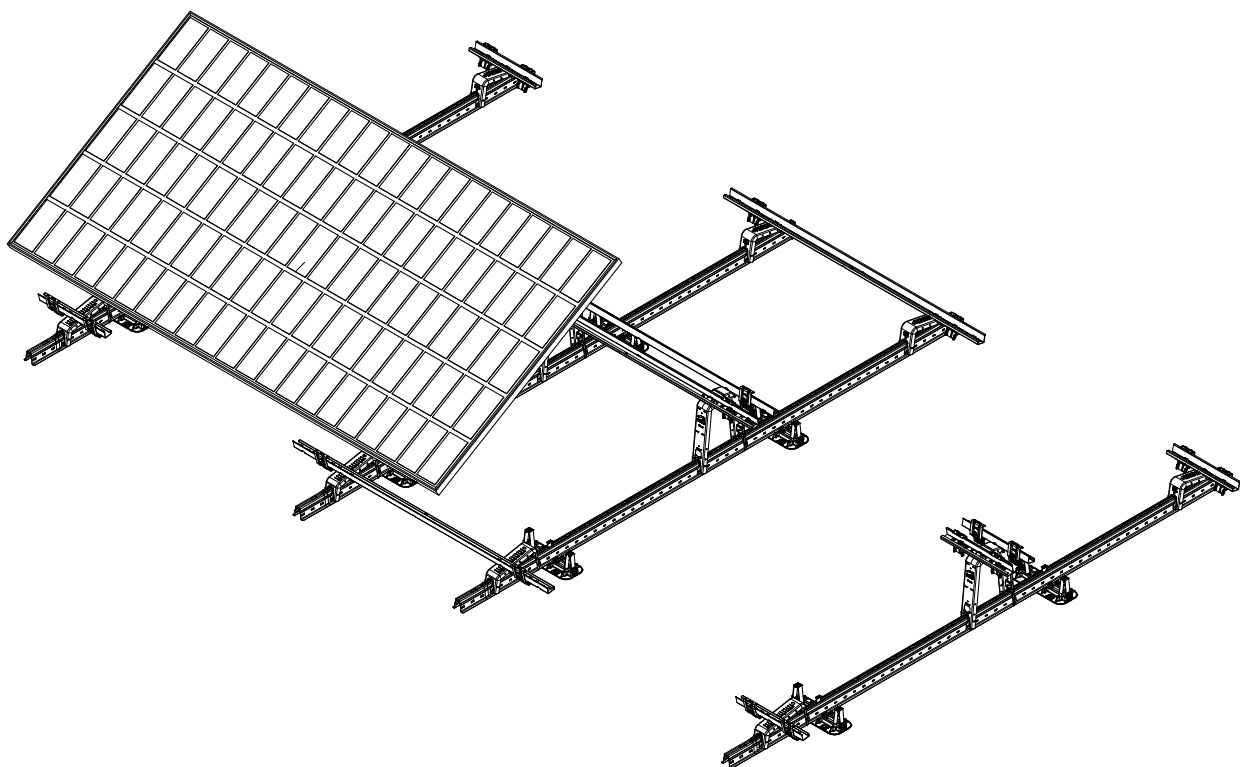


15

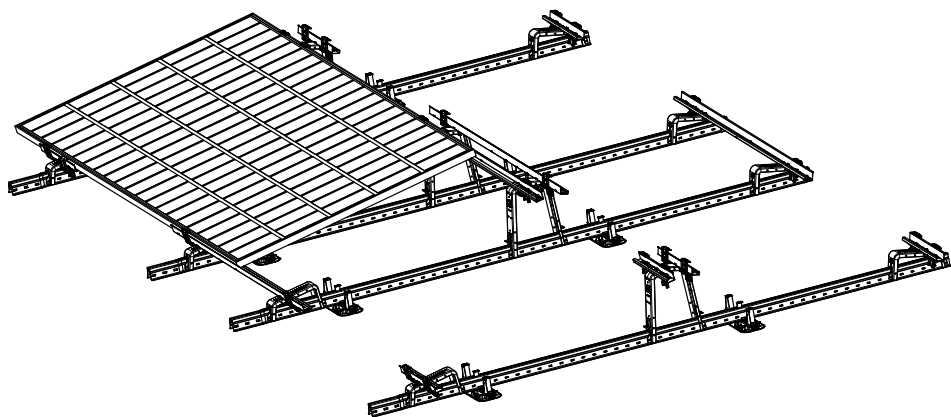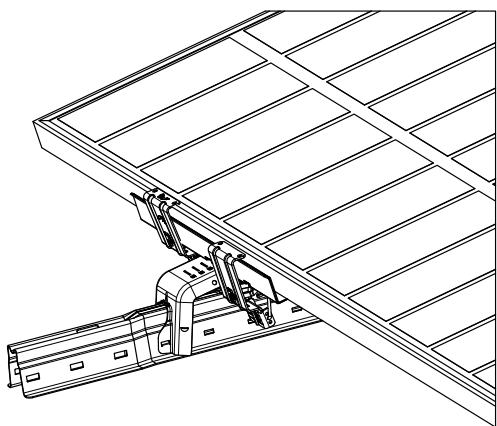

16

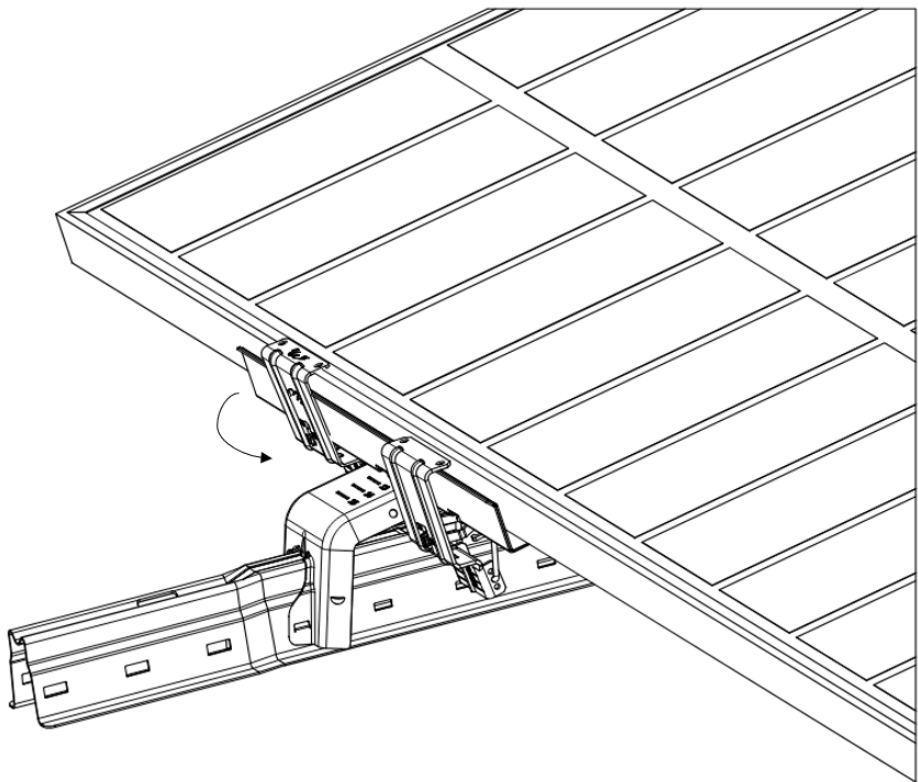

17

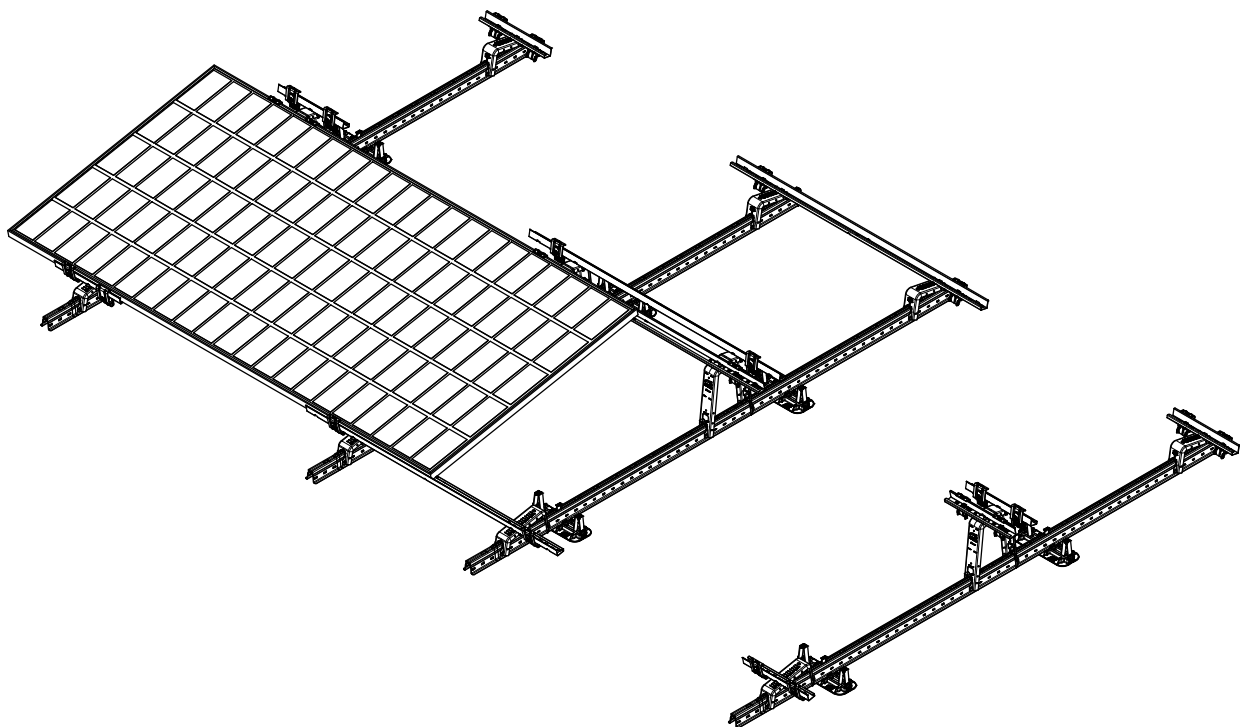

18

