



Datasheet ValkAce+ - Bitumen roof hook

Technical specifications

- Mounting system for “cold” pitched roofs with bitumen, EPDM or PVC roofing.
- Roof hooks can be used for horizontal and vertical profile mounting (portrait / landscape).
- Roof hook made of stainless steel.
- Roof hook coupling manufactured in steel with zinc magnesium coating featuring a high-quality plastic installation help.
- After installing the roof hook, the roof should be made waterproof again.


Key benefits ValkAce+ - Bitumen roof hook

- Specially developed roof hook for mounting on the roof boarding.
- Easy to use with ValkAce profiles and ValkGrip panel clamps.
- After installation, the roof can be easily made watertight by the roofer.

Article information

Material no.	747513
Description	ValkAce+ - Bitumen roof hook
GTIN code	08721586860063
Image	
Weight (kg)	0,47
Pcs. per packaging	25

Dimensions (mm)

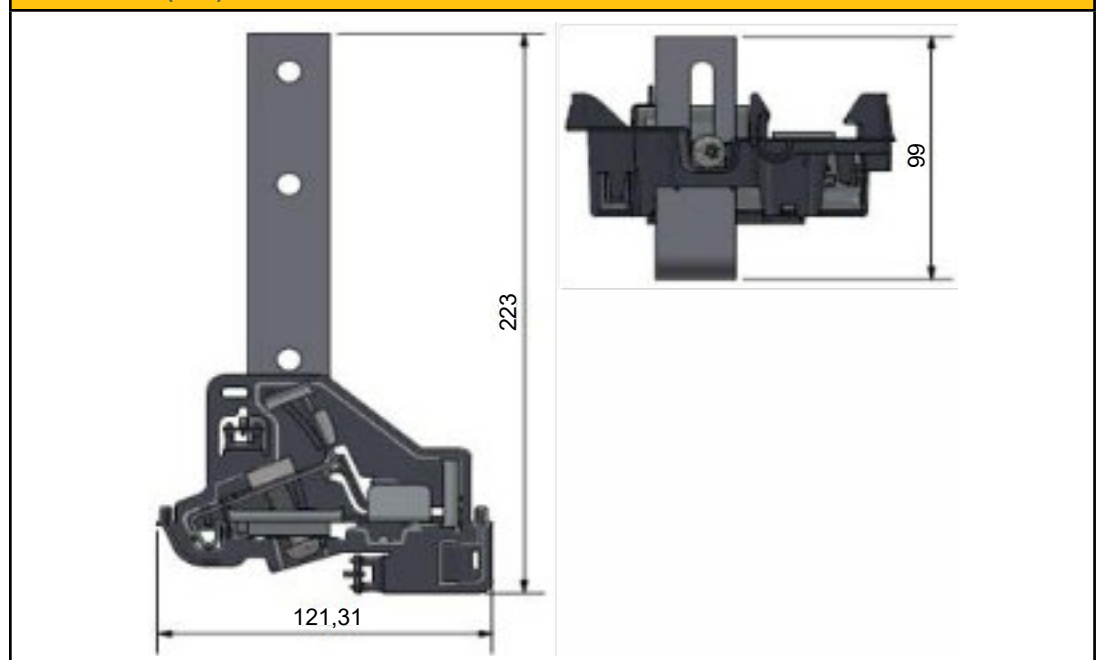



Datasheet ValkAce+ - Bitumen roof hook

Technical specifications ValkAce+

- Standard profile lengths ideal for panels 1134 mm wide.
- ValkGrip available for panel heights of 30 and 35 mm.
- Space between panels 14 mm.

Key benefits ValkAce

- Direct, slip-resistant panel fixation in a single movement using the ValkGrip module clamp.
- Enables safer and more ergonomic working without leaning over the panel.
- One universal clamp for both mid and side positions, ensuring a clean and consistent finish.
- Super-fast installation due to easy clip-on panel clamps and slide-in coupling and only one required tool (T30).
- Robust and future-proof system with a minimal number of components logistics.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.

Calculations

Projects using the ValkAce+ - Bitumen roof hook can be calculated easily and according to regionally applicable standards using the [ValkPVplannerPro](#).