



# Datasheet **ValkDouble** | **ValkTriple** | **ValkQuattro**


## Solar ramp

- By smart panel configuration up to 100% more panels per surface.
- Suitable for expansion roofs, ground mount, garage boxes or apartment buildings.
- Available in three variants: ValkDouble (2 panels), ValkTriple (3 panels) and ValkQuattro (4 panels).
- Height: ValkDouble approx. 502 mm, ValkTriple approx. 678 mm, ValkQuattro approx. 860 mm.

## Extension kit


To accommodate panels from 1014 to 1134 mm at the ValkDouble, ValkTriple (for ValkQuattro from 1014 till 1100 mm), these should be extended. For this you need an extension kit for every solar ramp.

## Hole pattern

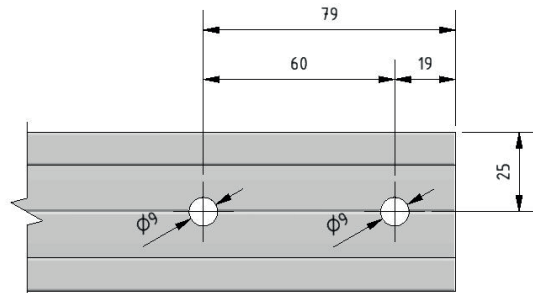


- In the case of the already existing aluminum profiles of the solar ramp, be sure to drill two holes ( $\phi 9$  mm) per profile at the end of the profile in accordance with the above hole pattern to fit the extension set.

## Articles




Aluminium profile



Aluminium coupling piece



SS tap bolt



SS flange nut

## Advice pitch

	ValkDouble	ValkTriple	ValkQuattro
Advice pitch (angle inclination 14,5°)	3300 mm	5000 mm	6700 mm
Distance between rows	1120 mm	1870 mm	2610 mm
Dimensions of systems (mm, l x pl* x h)	2180 x pl* x 540	3130 x pl* x 720	4090 x pl* x 900

\*pl = Panellenght

## Article overview

ValkDouble   ValkTriple   ValkQuattro	
Article number	Description
757050	Extension kit solar ramp - 1010-1046mm
757051	Extension kit solar ramp - 1038-1065mm
757052	Extension kit solar ramp - 1065-1100mm

## CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS

### Van der Valk Solar Systems + International

Westernesse 18 - 2635 BG Den Hoorn, The Netherlands  
 +31 174 25 49 99  
 sales@valksolarsystems.com

### Valk Solar Systems UK + IE

+44 1304 89 76 58  
 sales@valksolarsystems.co.uk

### Valk Solar Systems Ibérica

+34 910 787 616  
 ventas@valksolarsystems.es

### Valk Solar Systems Nordics

+46 8 55 82 86 26  
 sales@valksolarsystems.se



# Datasheet **ValkDouble** | **ValkTriple** | **ValkQuattro**

## Solar ramp

Maximum panel width of the solar ramps bij application of the 721550(ZW) and 721552(ZW) clamps for panels with a frame.

	Total length without extension kit	Max. panel width
ValkDouble	2098	1014 mm
ValkTriple	3109	1010 mm
ValkQuattro	4120	1008 mm


	Total length incl. extension kit (757050 - Extension kit solar ramp - panel width 1010-1046mm)	Max. panel width
ValkDouble	2248	1089 mm
ValkTriple	3259	1060 mm
ValkQuattro	4270	1045 mm

	Total length incl. extension kit medium (757051 - Extension kit solar ramp - panel width 1038-1065mm)	Max. panel width
ValkDouble	2298	1114 mm
ValkTriple	3309	1076 mm
ValkQuattro	4320	1058 mm

	Total length incl. extension kit long (757052 - Extension kit solar ramp - panel width 1065-1100mm)	Max. panel width
ValkDouble	2478	1204 mm
ValkTriple	3489	1136 mm
ValkQuattro	4500	1103 mm

Please note by the ValkTriple and ValkQuattro 2 holes have to be drilled manually on the side of the extension kit in the 7271010 profile.

The center from the end of the profile at 19 mm and 79 mm with a cross section of  $\varnothing 9$  mm.

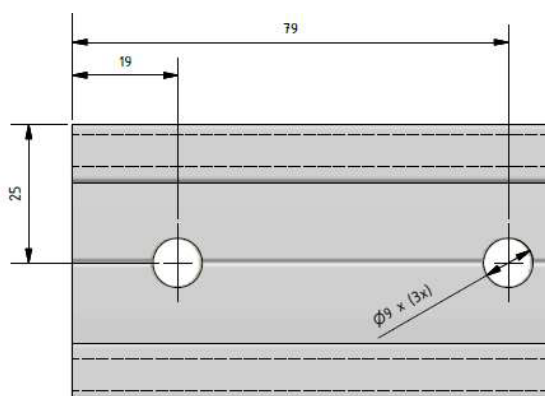

## CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS